


EMERGENCY DOWNLIGHT - E-
DOWNLIGHT

Item code 86.E003.1571.01




Scheme

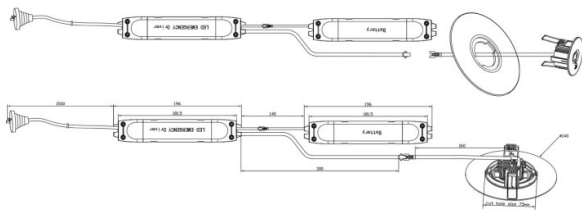

Photometry

EMERGENCY DOWNLIGHT - E-DOWNLIGHT

Item code 86.E003.1571.01

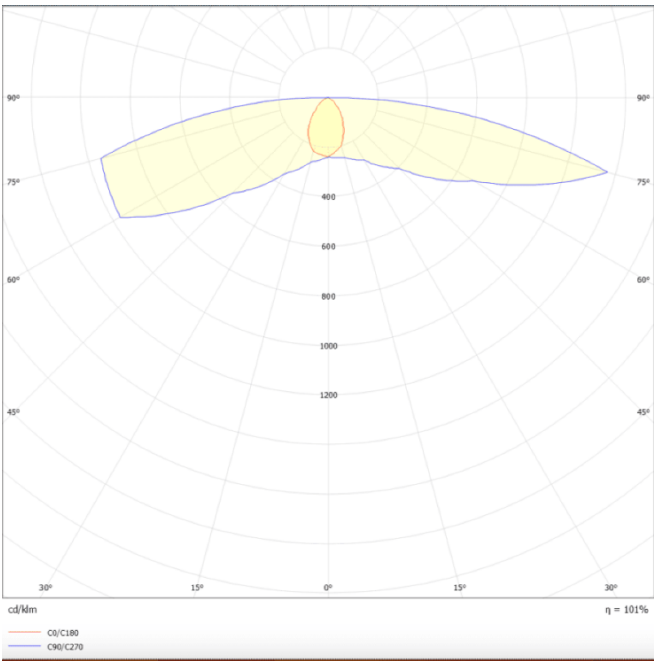

E-DOWNLIGHT

Emergency downlight, 3W, 3hrs, circular lens, white. Controlled by smart IC, with self-test function. Made in die cast aluminum has a lens oval shape for escape lighting. LiFePO4 battery, long lifetime. On-OFF driver.

Item code	86.E003.1571.01
Product type	Emergency
Category	Emergency downlight
Family	E-DOWNLIGHT
Pictograms	<div><div></div><div>50 Hz</div><div>220 V</div><div>240 V</div><div>CE</div><div>Driver INCL</div><div>On Off</div><div>IP 20</div></div>

Product	
Real power (W)	3
Real luminous flux (Lm)	220
Beam angle (°)	165x68
IP	20
Electrical class insulation	Class II
Colour	white
Chip Brand	Smalite
Control gear included	yes
Control gear	ON-OFF
Light source	LED
Colour temperature (K)	5000
CRI	>70
Emergency battery life time	3