




**E-EXIT**

Emergency exit fixture double sided surface mounted, 1W, 3hrs, white color. LED self-contained luminaire with manual test and auto test optional. Replaceable pictogram design, including arrow right, left, down, up. Pictogram inserts all in one package.

LiFePO4 battery, long lifetime. On-OFF driver.

**Scheme**

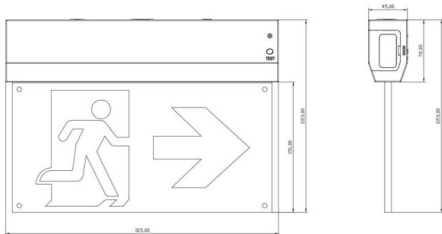

<b>Item code</b>	<b>86.E004.2501.01</b>
<b>Product type</b>	<b>Emergency</b>
<b>Category</b>	<b>Signaling luminaire</b>
<b>Family</b>	<b>E-EXIT</b>
<b>Subfamily</b>	<b>E-EXIT</b>
<b>Pictograms</b>	<div style="display: flex; flex-wrap: wrap; gap: 5px;"> <div style="border: 1px solid gray; padding: 2px;">□</div> <div style="border: 1px solid gray; padding: 2px;">50 60 Hz</div> <div style="border: 1px solid gray; padding: 2px;">220 240 V</div> <div style="border: 1px solid gray; padding: 2px;">CE</div> <div style="border: 1px solid gray; padding: 2px;">Driver INCL.</div> </div> <div style="display: flex; margin-top: 5px;"> <div style="border: 1px solid gray; padding: 2px; margin-right: 5px;">On Off</div> <div style="border: 1px solid gray; padding: 2px;">IP 20</div> </div>

<b>Product</b>	
<b>Real power (W)</b>	<b>1</b>
<b>Beam angle (°)</b>	<b>180</b>
<b>IP</b>	<b>20</b>
<b>Electrical class insulation</b>	<b>Class II</b>
<b>Colour</b>	<b>white</b>
<b>Control gear included</b>	<b>yes</b>
<b>Control gear</b>	<b>ON-OFF</b>
<b>Light source</b>	<b>LED</b>
<b>Type of LED</b>	<b>SMD</b>
<b>Colour temperature (K)</b>	<b>5000</b>
<b>CRI</b>	<b>&gt;70</b>
<b>Emergency battery life time</b>	<b>3</b>