



E-EXIT


Emergency exit fixture double sided surface mounted, 1W, 3hrs, white color. LED self-contained luminaire with manual test and auto test optional. Replaceable pictogram design, including arrow right, left, down, up. Pictogram inserts all in one package.

LiFePO4 battery, long lifetime. On-OFF driver.

Item code	86.E004.3501.01
Product type	Emergency
Category	Signaling luminaire
Family	E-EXIT
Subfamily	E-EXIT
Pictograms	<div style="display: flex; flex-wrap: wrap; gap: 5px;"> <div style="border: 1px solid gray; padding: 2px;">□</div> <div style="border: 1px solid gray; padding: 2px;">50 60 Hz</div> <div style="border: 1px solid gray; padding: 2px;">220 240 V</div> <div style="border: 1px solid gray; padding: 2px;">CE</div> <div style="border: 1px solid gray; padding: 2px;">Driver INCL.</div> </div> <div style="display: flex; margin-top: 5px;"> <div style="border: 1px solid gray; padding: 2px; margin-right: 5px;">On Off</div> <div style="border: 1px solid gray; padding: 2px;">IP 20</div> </div>

Product	
Real power (W)	1
Beam angle (°)	180
IP	20
Electrical class insulation	Class II
Colour	white
Control gear included	yes
Control gear	ON-OFF
Light source	LED
Type of LED	SMD
Colour temperature (K)	5000
CRI	>70
Emergency battery life time	3

Scheme

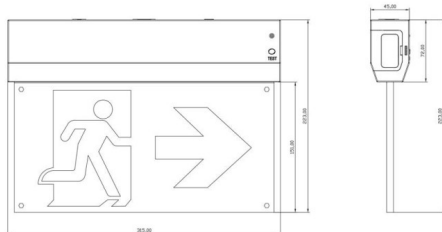

Photometry

