




E-DOWNLIGHT


Emergency downlight, 3W, 3hrs, circular lens, white. Controlled by smart IC, with self-test function. Made in die cast aluminum has a lense of round shape for anti-panic lighting. LiFePO4 battery, long lifetime. On-OFF driver.

| | |
|---------------------|----------------------------|
| Item code | 86.E006.1521.01 |
| Product type | Emergency |
| Category | Emergency downlight |
| Family | E-DOWNLIGHT |

Pictograms



Scheme

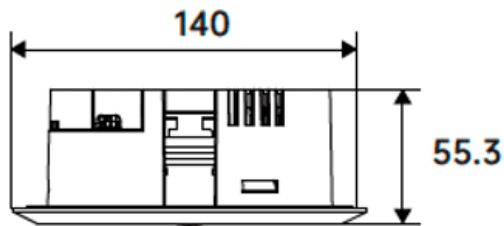

| | |
|------------------------------------|-----------------|
| Product | |
| Real power (W) | 3 |
| Real luminous flux (Lm) | 240 |
| Beam angle (°) | 148 |
| IP | 20 |
| Electrical class insulation | Class II |
| Colour | white |
| Control gear included | yes |
| Control gear | ON-OFF |
| Light source | LED |
| Type of LED | SMD |
| Colour tepe (K) | 5000 |
| CRI | >70 |
| Emergency battery life time | 3 |

Photometry

