






E-S/R DOWNLIGHT

Emergency surface/recessed downlight , 3W, 3hrs, circular lens, black. Controlled by smart IC, with self-test function. Made in die cast aluminum has a lense of round shape for anti-panic lighting.LiFePO4 battery, long lifetime. On-OFF driver. 240lm.


Item code	86.E007.1521.02
Product type	Emergency
Category	Emergency downlight
Family	E-S/R DOWNLIGHT
Pictograms	 50 Hz 220 V 240 V  Driver INCL.  IP 20

Product	
Real power (W)	3
Real luminous flux (Lm)	240
Beam angle (°)	148
IP	20
Electrical class insulation	Class II
Colour	black
Control gear included	yes
Control gear	ON-OFF
Light source	LED
Colour temperature (K)	5000
CRI	>70
Emergency battery life time	3

Dimensions

Product dimensions (mm) Ø140*55.3mm

Scheme

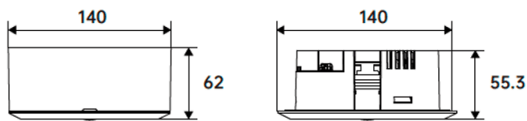

Photometry

