



E-S/R DOWNLIGHT


Emergency surface/recessed downlight , 3W, 3hrs, circular lens, white. Controlled by smart IC, with self-test function. Made in die cast aluminum has a lens oval shape for escape lighting. LiFePO4 battery, long lifetime. On-OFF driver. 240lm.

Item code	86.E007.1571.01
Product type	Emergency
Category	Emergency downlight
Family	E-S/R DOWNLIGHT
Pictograms	<div style="display: flex; justify-content: space-around; align-items: center;"> 50 60 Hz 220 240 V CE Driver INCL. </div> <div style="display: flex; justify-content: space-around; align-items: center; margin-top: 10px;"> On Off IP 20 </div>


Dimensions

Product dimensions (mm) Ø140*55.3mm

Scheme



Photometry

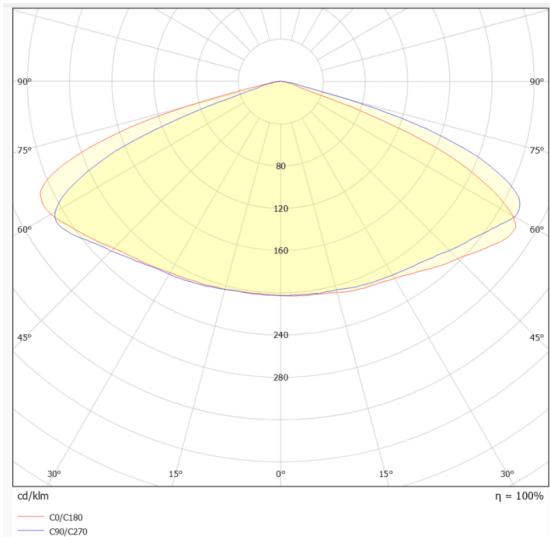

Product

Real power (W)	3
Real luminous flux (Lm)	240
Beam angle (°)	165x68
IP	20
Electrical class insulation	Class II
Colour	white
Control gear included	yes
Control gear	ON-OFF
Light source	LED
Colour temperature (K)	5000
CRI	>70
Emergency battery life time	3