




**E-S/R DOWNLIGHT**

Emergency surface/recessed downlight , 3W, 3hrs, circular lens, black. Controlled by smart IC, with self-test function. Made in die cast aluminum has a lens oval shape for escape lighting. LiFePO4 battery, long lifetime. On-OFF driver. 240lm.

<b>Item code</b>	<b>86.E007.1571.02</b>
<b>Product type</b>	<b>Emergency</b>
<b>Category</b>	<b>Emergency downlight</b>
<b>Family</b>	<b>E-S/R DOWNLIGHT</b>


**Pictograms**




**Dimensions**

**Product dimensions (mm)**      **Ø140\*55.3mm**

**Scheme**

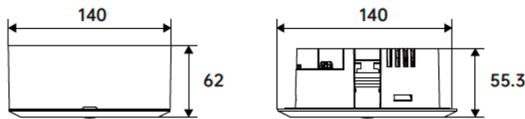

**Photometry**

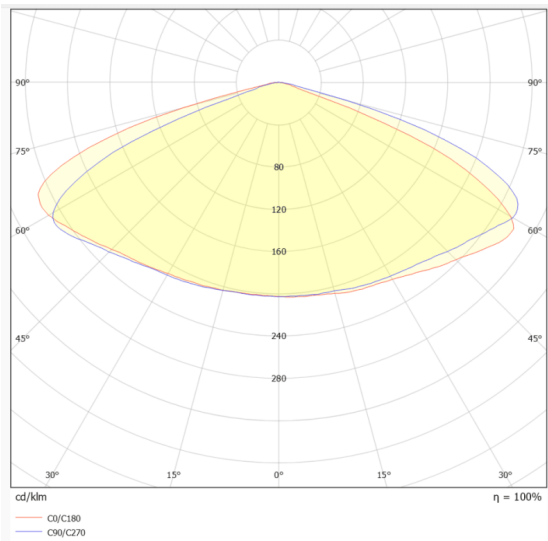

**Product**

<b>Real power (W)</b>	<b>3</b>
<b>Real luminous flux (Lm)</b>	<b>240</b>
<b>Beam angle (°)</b>	<b>165x68</b>
<b>IP</b>	<b>20</b>
<b>Electrical class insulation</b>	<b>Class II</b>
<b>Colour</b>	<b>black</b>
<b>Control gear included</b>	<b>yes</b>
<b>Control gear</b>	<b>ON-OFF</b>
<b>Light source</b>	<b>LED</b>
<b>Type of LED</b>	<b>SMD</b>
<b>Colour temperature (K)</b>	<b>5000</b>
<b>CRI</b>	<b>&gt;70</b>
<b>Emergency battery life time</b>	<b>3</b>