



E-S/R DOWNLIGHT

Emergency surface/recessed downlight , 6W, 3hrs, circular lens, black. Controlled by smart IC, with self-test function. Made in die cast aluminum has a lens oval shape for escape lighting. LiFePO4 battery, long lifetime. On-OFF driver. 450lm.

Item code	**86.E007.2571.02**
Product type	**Emergency**
Category	**Emergency downlight**
Family	**E-S/R DOWNLIGHT**
Pictograms	

Dimensions	
Product dimensions (mm)	**Ø140*55.3mm**

Scheme

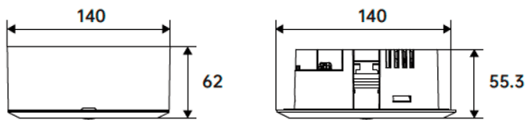

Product	
Real power (W)	**6**
Real luminous flux (Lm)	**450**
Beam angle (º)	**165x68**
IP	**20**
Electrical class insulation	**Class II**
Colour	**black**
Control gear included	**yes**
Control gear	**ON-OFF**
Light source	**LED**
Type of LED	**SMD**
Colour temperature (K)	**5000**
CRI	**>70**
Emergancy battery life time	**3**

Photometry

