



E-S/R DOWNLIGHT

Emergency surface/recessed downlight , 6W, 3hrs, circular lens, black. Controlled by smart IC, with self-test function. Made in die cast aluminum has a lens oval shape for escape lighting. LiFePO4 battery, long lifetime. On-OFF driver. 450lm.

Item code	86.E007.2571.02
Product type	Emergency
Category	Emergency downlight
Family	E-S/R DOWNLIGHT


Pictograms

- 50/60 Hz
- 220/240 V
- CE
- Driver INCL
- On/Off
- IP 20


Dimensions

Product dimensions (mm) **Ø140*55.3mm**

Scheme

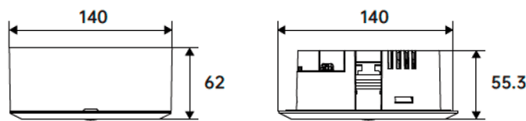

Photometry

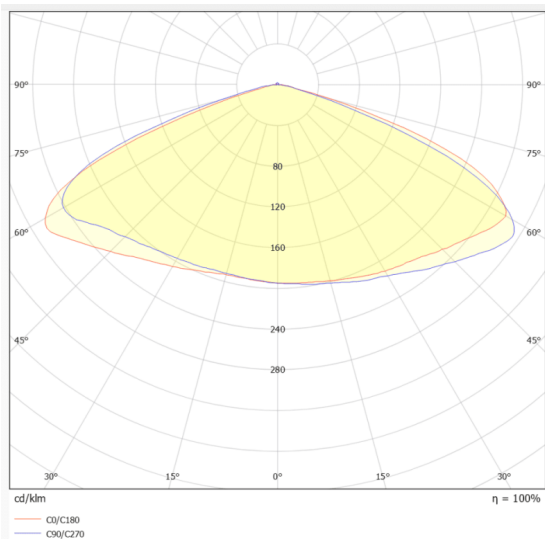

Product

Real power (W)	6
Real luminous flux (Lm)	450
Beam angle (°)	165x68
IP	20
Electrical class insulation	Class II
Colour	black
Control gear included	yes
Control gear	ON-OFF
Light source	LED
Type of LED	SMD
Colour temperature (K)	5000
CRI	>70
Emergency battery life time	3