




### AQUILA II

Lavov flood light from the family AQUILA II with a power of 50W and an optics 26x60° tilt10° degrees . CCT 4000K. With a total lumen output of 7500lm and a luminous efficiency of 150lm/W.ON-OFF driver. Made in die cast aluminum and finished in Black color. IP66 and IK 08 degree of protection.

### Scheme

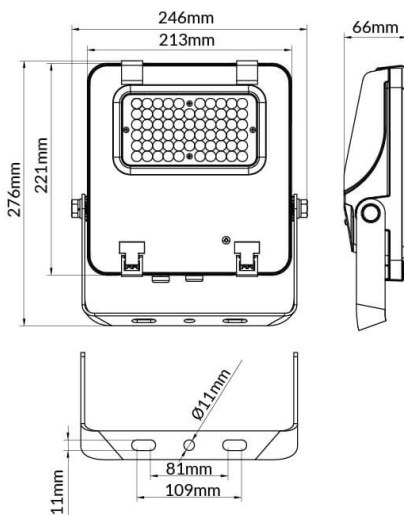

|                     |                         |
|---------------------|-------------------------|
| <b>Item code</b>    | <b>86.I0018.1461.02</b> |
| <b>Product type</b> | <b>Indoor</b>           |
| <b>Category</b>     | <b>Industrial</b>       |
| <b>Family</b>       | <b>AQUILA II</b>        |
| <b>Subfamily</b>    | <b>AQUILA II</b>        |
| <b>Pictograms</b>   |                         |

|                                    |                       |
|------------------------------------|-----------------------|
| <b>Product</b>                     |                       |
| <b>Real power (W)</b>              | <b>50</b>             |
| <b>Real luminous flux (Lm)</b>     | <b>7500</b>           |
| <b>Luminous efficiency (Lm/W)</b>  | <b>150</b>            |
| <b>Beam angle (°)</b>              | <b>26x60° tilt10°</b> |
| <b>Life time (h)</b>               | <b>50000h L70B50</b>  |
| <b>IP</b>                          | <b>66</b>             |
| <b>Electrical class insulation</b> | <b>Class I</b>        |
| <b>Colour</b>                      | <b>Black</b>          |
| <b>Control gear included</b>       | <b>Yes</b>            |
| <b>Control gear</b>                | <b>ON-OFF</b>         |
| <b>Light source</b>                | <b>LED</b>            |
| <b>Type of LED</b>                 | <b>2835</b>           |
| <b>Colour temperature (K)</b>      | <b>4000</b>           |
| <b>Colour consistency (SDCM)</b>   | <b>SDCM5</b>          |
| <b>CRI</b>                         | <b>≥70</b>            |
| <b>IK</b>                          | <b>08</b>             |