








AQUILA II

Lavov flood light from the family AQUILA II with a power of 100W and an optics 25º degrees . CCT 4000K. With a total lumen output of 15500lm and a luminous efficiency of 155lm/W.ON-OFF driver. Made in die cast aluminum and finished in Black color. IP66 and IK 08 degree of protection.

| | |
|--------------|--|
| Item code | 86.I0018.2411.02 |
| Product type | Outdoor |
| Category | Floodlights |
| Family | AQUILA II |
| Pictograms |  50 Hz 220 V 240 V 850° SDCM 3  Driver INCL. On Off   IP 66 CRI 70 IK 08 50000h L70B50 |

Scheme

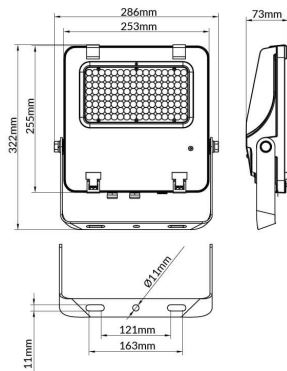

| | |
|-----------------------------|---------------|
| Product | |
| Real power (W) | 100 |
| Real luminous flux (Lm) | 15500 |
| Luminous efficiency (Lm/W) | 155 |
| Beam angle (º) | 25º |
| Life time (h) | 50000h L70B50 |
| IP | 66 |
| Electrical class insulation | Class I |
| Colour | Black |
| Control gear included | Yes |
| Control gear | ON-OFF |
| Light source | LED |
| Type of LED | 2835 |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<5 |
| CRI | ≥70 |
| IK | 08 |