



### AQUILA II

Lavov flood light from the family AQUILA II with a power of 100W and an optics 26x60° tilt10° degrees . CCT 4000K. With a total lumen output of 15500lm and a luminous efficiency of 155lm/W.DALI driver. Made in die cast aluminum and finished in Black color. IP66 and IK 08 degree of protection.

**Item code** 86.I0018.2463.02


**Product type** Indoor

**Category** Industrial


**Family** AQUILA II

**Subfamily** AQUILA II

**Pictograms**



### Scheme

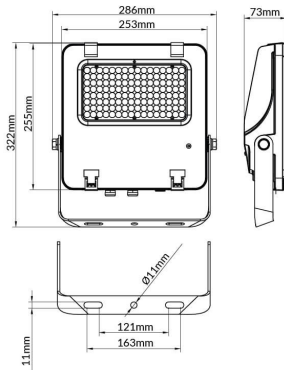

### Product

**Real power (W)** 100

**Real luminous flux (Lm)** 15500

**Luminous efficiency (Lm/W)** 155

**Beam angle (°)** 26x60° tilt10°

**Life time (h)** 50000h L70B50

**IP** 66

**Electrical class insulation** Class I

**Colour** Black

**Control gear included** Yes

**Control gear** DALI

**Light source** LED

**Type of LED** 2835

**Colour temperature (K)** 4000

**Colour consistency (SDCM)** SDCM<5

**CRI** ≥70

**IK** 08