










AQUILA II

Lavov flood light from the family AQUILA II with a power of 150W and an optics 55x125°, tilt55 degrees . CCT 4000K. With a total lumen output of 23250lm and a luminous efficiency of 155lm/W.DALI driver. Made in die cast aluminum and finished in Black color. IP66 and IK 08 degree of protection.

|              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item code    | 86.I0018.3453.02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Product type | Outdoor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Category     | Floodlights                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Family       | AQUILA II                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Pictograms   |  50 Hz 220 V 240 V  850° SDCM 3<br> Driver INCL.   <br>IP 66 CRI 70 IK 08 50000h L70B50 |

Scheme

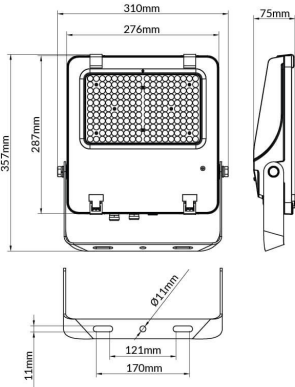

|                             |                 |
|-----------------------------|-----------------|
| Product                     |                 |
| Real power (W)              | 150             |
| Real luminous flux (Lm)     | 23250           |
| Luminous efficiency (Lm/W)  | 155             |
| Beam angle (°)              | 55x125°, tilt55 |
| Life time (h)               | 50000h L70B50   |
| IP                          | 66              |
| Electrical class insulation | Class I         |
| Colour                      | Black           |
| Control gear included       | Yes             |
| Control gear                | DALI            |
| Light source                | LED             |
| Type of LED                 | 2835            |
| Colour temperature (K)      | 4000            |
| Colour consistency (SDCM)   | SDCM<5          |
| CRI                         | ≥70             |
| IK                          | 08              |