




**AQUILA II**

Lavov flood light from the family AQUILA II with a power of 240W and an optics 55x125°, tilt55 degrees . CCT 4000K. With a total lumen output of 38400lm and a luminous efficiency of 160lm/W.ON-OFF driver. Made in die cast aluminum and finished in Black color. IP66 and IK 08 degree of protection.

**Scheme**

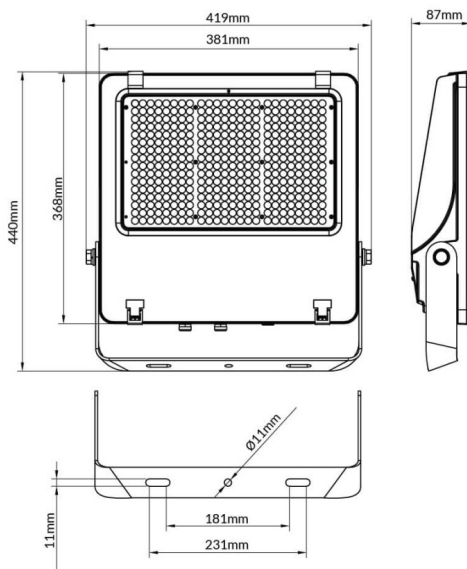

<b>Item code</b>	<b>86.I0018.5451.02</b>
<b>Product type</b>	<b>Outdoor</b>
<b>Category</b>	<b>Floodlights</b>
<b>Family</b>	<b>AQUILA II</b>
<b>Subfamily</b>	<b>AQUILA II</b>

**Pictograms**

	50 60 Hz	220 240 V		SDCM 3
CE	Driver INCL.	On Off		
IP 66	CRI 70	IK 08	50000h L70B50	

<b>Product</b>	
<b>Real power (W)</b>	<b>240</b>
<b>Real luminous flux (Lm)</b>	<b>38400</b>
<b>Luminous efficiency (Lm/W)</b>	<b>160</b>
<b>Beam angle (°)</b>	<b>55x125°, tilt55</b>
<b>Life time (h)</b>	<b>50000h L70B50</b>
<b>IP</b>	<b>66</b>
<b>Electrical class insulation</b>	<b>Class I</b>
<b>Colour</b>	<b>Black</b>
<b>Control gear included</b>	<b>Yes</b>
<b>Control gear</b>	<b>ON-OFF</b>
<b>Light source</b>	<b>LED</b>
<b>Type of LED</b>	<b>2835</b>
<b>Colour temperature (K)</b>	<b>4000</b>
<b>Colour consistency (SDCM)</b>	<b>SDCM5</b>
<b>CRI</b>	<b>≥70</b>
<b>IK</b>	<b>08</b>