

## WATERPROOF

Lavov Industrial fixture from the family WATERPROOF with a power of 48W and an optics 120 degrees . CCT 4000K. With a total lumen output of 6720Lm lm and a luminous efficiency of 140lm/W. ON-OFF driver. Made in PC body with polycarbonate with UV Stabilised Cover material , special design for the cover with more higher light efficiency and finished in Silver color. IP65 and IK08 degree of protection.

| | |
|---|---|
| **Item code** | **86.I007.4401.03** |
| **Product type** | **Indoor** |
| **Category** | **Industrial** |
| **Family** | **WATERPROOF** |
| **Subfamily** | **WATERPROOF** |
| **Pictograms** |  |

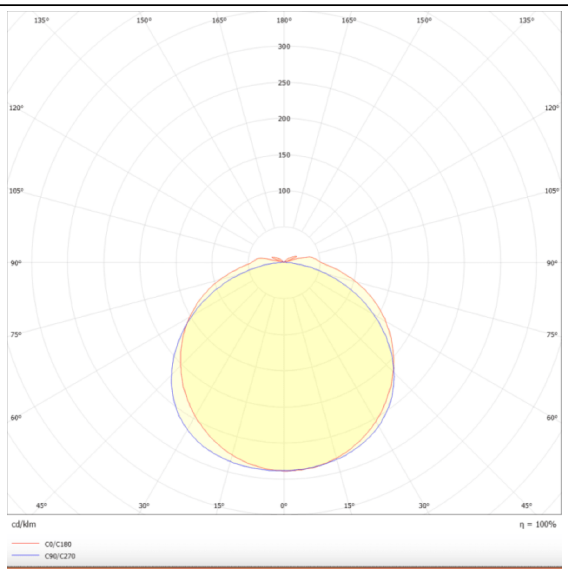
| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **1200x99x72** |

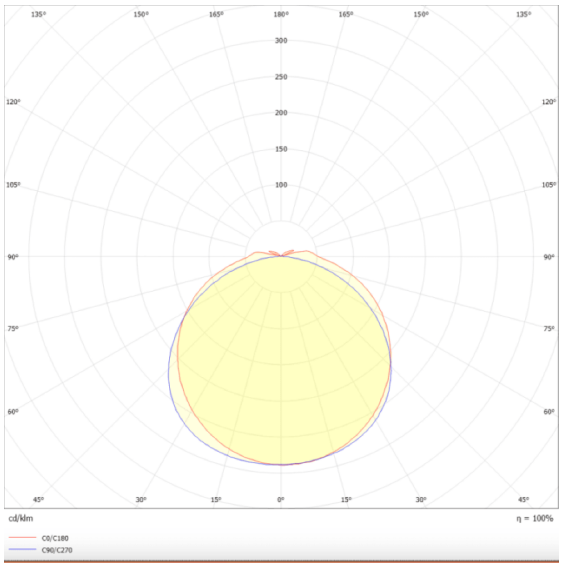
**Scheme**




| **Product** | |
|---|---|
| **Real power (W)** | **48** |
| **Real luminous flux (Lm)** | **6720Lm** |
| **Luminous efficiency (Lm/W)** | **140** |
| **Beam angle (º)** | **120** |
| **Life time (h)** | **50000h L70B50** |
| **IP** | **65** |
| **Colour** | **Silver** |
| **Control gear included** | **Yes** |
| **Control gear** | **ON-OFF** |
| **Light source** | **LED** |
| **Type of LED** | **SMD** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **08** |

## Photometry


135° 150° 165° 180° 165° 150° 135°
300
250
200
150
100
120° 120°
105° 105°
90° 90°
75° 75°
60° 60°
45° 30° 15° 0° 15° 30° 45°
cd/klm
η = 100%
C0/C180
C90/C270


135° 150° 165° 180° 165° 150° 135°
300
250
200
150
100
120° 120°
105° 105°
90° 90°
75° 75°
60° 60°
45° 30° 15° 0° 15° 30° 45°
cd/klm
η = 100%
C0/C180
C90/C270