

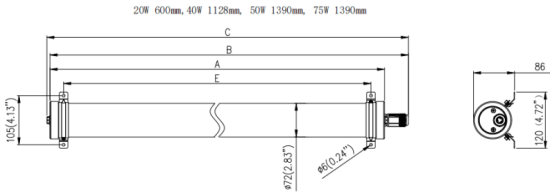
## TUBEPROOF

Lavov Industrial ficture from the family TUBEPROOF, with a power of 40W and a 120º beam angle. Finished in White colour.Dimensions 120x86x1128mm. With a total lumen output of 6600lm and a luminous efficiency of 165lm/W. CCT 4000. Driver DALI. Made in PC BODY. IP66. IK10

| | |
|---|---|
| **Item code** | **86.I008.2403.01** |
| **Product type** | **Indoor** |
| **Category** | **Industrial** |
| **Family** | **TUBEPROOF** |
| **Subfamily** | **TUBEPROOF** |
| **Pictograms** |  |

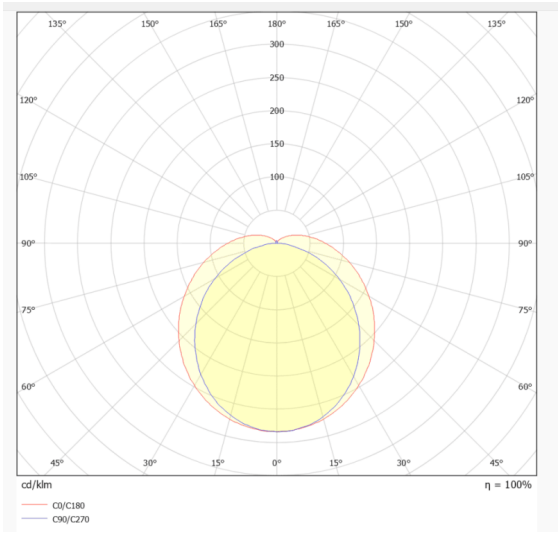
| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **120x86x1128mm** |

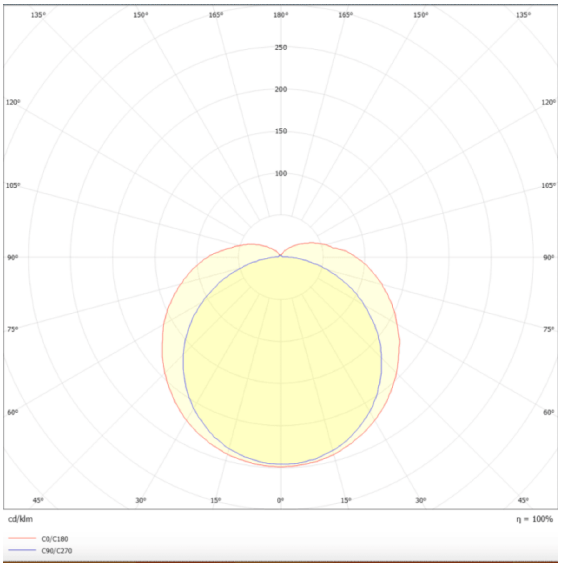
**Scheme**




| **Product** | |
|---|---|
| **Real power (W)** | **40** |
| **Real luminous flux (Lm)** | **6600** |
| **Luminous efficiency (Lm/W)** | **165** |
| **Beam angle (º)** | **120º** |
| **Life time (h)** | **60,000hrs-L90B50** |
| **IP** | **66** |
| **Colour** | **White** |
| **Control gear included** | **Yes** |
| **Control gear** | **DALI** |
| **Light source** | **LED** |
| **Type of LED** | **SMD** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK10** |

## Photometry


135° 150° 165° 180° 165° 150° 135°
300
250
200
150
100
120° 120°
105° 105°
90° 90°
75° 75°
60° 60°
45° 30° 15° 0° 15° 30° 45°
cd/klm
η = 100%
C0/C180
C90/C270


cd/klm
η = 100%
C0/C180
C90/C270