

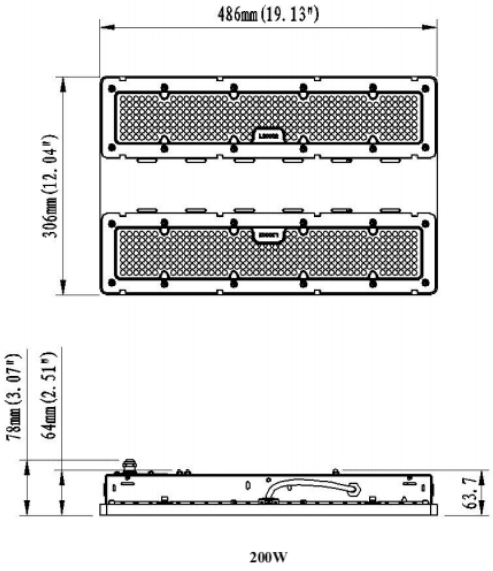
## DRACO II LINEAR

Lavov Industrial fixture from the family DRACO II LINEAR with a power of 200 (Selectable 120,160,200)W and a beam angle of Asymmetric: 30*85º. Dimensions 486×306×78mm. Finished in White colour.With a total lumen output of 36000lm/m and a luminous efficacy of 180lm/W. CCT 4000. CRI>80. IP40. IK08.

| | |
|---|---|
| **Item code** | **86.I020.1451.01** |
| **Product type** | **Indoor** |
| **Category** | **Industrial** |
| **Family** | **DRACO II LINEAR** |
| **Subfamily** | **DRACO II LINEAR** |
| **Pictograms** |  |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **486×306×78mm** |

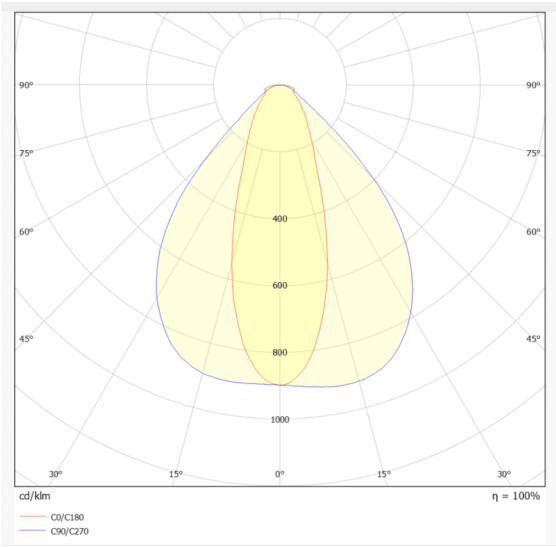
**Scheme**

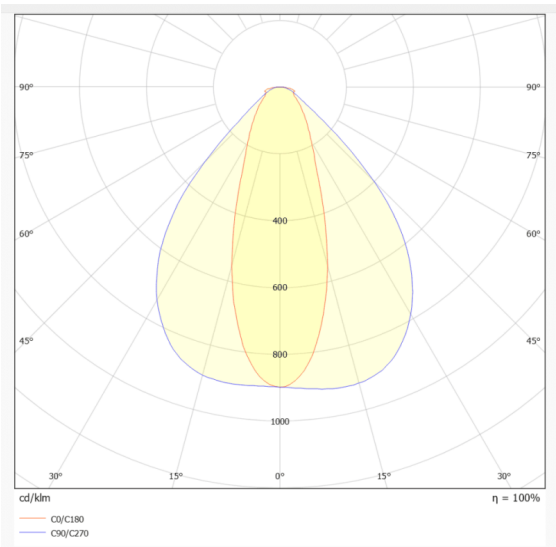



200W

| **Product** | |
|---|---|
| **Real power (W)** | **200 (Selectable 120,160,200)** |
| **Real luminous flux (Lm)** | **36000** |
| **Luminous efficiency (Lm/W)** | **180** |
| **Beam angle (º)** | **Asymmetric: 30*85** |
| **Life time (h)** | **50000h L70B10** |
| **IP** | **40** |
| **Colour** | **White** |
| **U. G. R** | **26** |
| **Control gear included** | **Yes** |
| **Control gear** | **1-10V Dimmable** |
| **Light source** | **LED** |
| **Type of LED** | **2835** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM5** |
| **CRI** | **80** |
| **IK** | **08** |

## Photometry


90°
75°
60°
45°
400
600
800
1000
30°
15°
0°
cd/klm
η = 100%
C0/C180
C90/C270


90°
75°
60°
45°
400
600
800
1000
30°
15°
0°
cd/klm
η = 100%
C0/C180
C90/C270