


## OVNI-R

Lavov Highbay from the family OVNI-R with a power of 186.4W and a 15 degrees beam angle. Installation with brackets as flood light. With a total lumen output of 13551.28lm and a luminous efficiency of 72.7lm/W. Driver ON-OFF .Made in Die cast aluminium and PC reflectors . Class II issolation. IP65 and IK09 . Mains voltage 120-277V . UGR19. Finished in black colour. CCT 4000K.

| | |
|---|---|
| **Item code** | **86.I032.2411.02** |
| **Product type** | **Indoor** |
| **Category** | **Industrial** |
| **Family** | **OVNI** |
| **Subfamily** | **OVNI-R** |
| **Pictograms** | CRI 80 · CE · Driver INCL. · On Off · 1-10V |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **357.9*170mm** |

**Scheme**

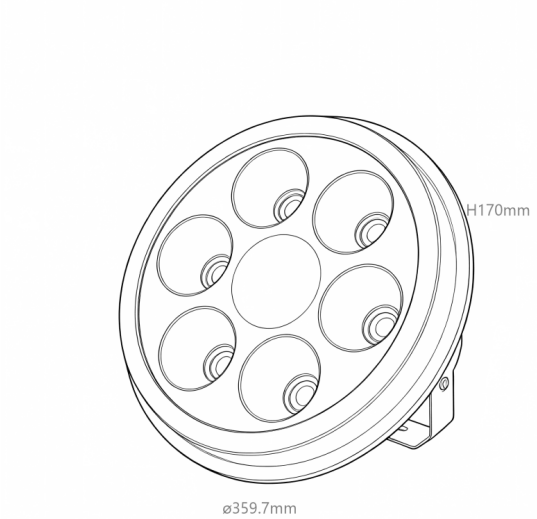


| **Product** | |
|---|---|
| **Real power (W)** | **186.4** |
| **Real luminous flux (Lm)** | **13551.28** |
| **Luminous efficiency (Lm/W)** | **72.7** |
| **Beam angle (º)** | **15** |
| **IP** | **65** |
| **Electrical class insulation** | **Class II** |
| **Electrical feeding** | **120-277V** |
| **Colour** | **black** |
| **U. G. R** | **19** |
| **Control gear included** | **yes** |
| **Control gear** | **ON-OFF** |
| **Light source** | **LED** |
| **Type of LED** | **PURI** |
| **Colour temperature (K)** | **4000** |
| **IK** | **09** |