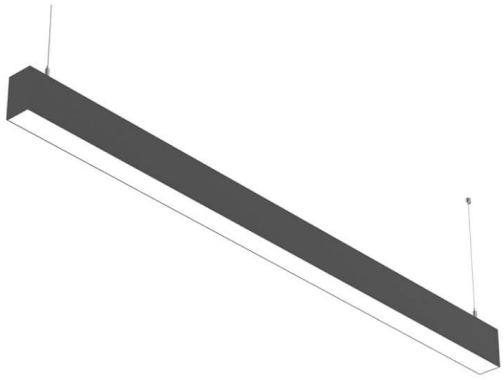


## SLINE

Lavov linear system from the family SLINE with a power of 80W and an optics 77 degrees beam angle. CCT 4000. CRI 80. Microprismatic diffuser. UGR19. With a total lumen output of 7200lm and an efficacy of 90lm/W . Made in Extruded Aluminium and finished in White color. DALI driver.

| | |
|---|---|
| **Item code** | **86.L001.4493.01** |
| **Product type** | **Indoor** |
| **Category** | **Linear Systems** |
| **Family** | **SLINE** |
| **Pictograms** |  |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **50x75X2400mm** |

**Scheme**



| **Product** | |
|---|---|
| **Real power (W)** | **80** |
| **Real luminous flux (Lm)** | **7200** |
| **Luminous efficiency (Lm/W)** | **90** |
| **Beam angle (º)** | **77** |
| **Life time (h)** | **50000h L80B10** |
| **IP** | **20** |
| **Colour** | **White** |
| **U. G. R** | **19** |
| **Control gear included** | **Yes** |
| **Control gear** | **DALI** |
| **Light source** | **LED** |
| **Type of LED** | **SMD** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |