



Dimensions

Product dimensions (mm) L1232mm×W50mm×H80mm

Scheme

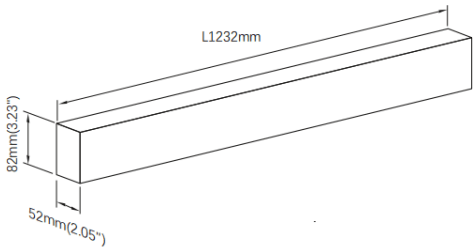

Photometry

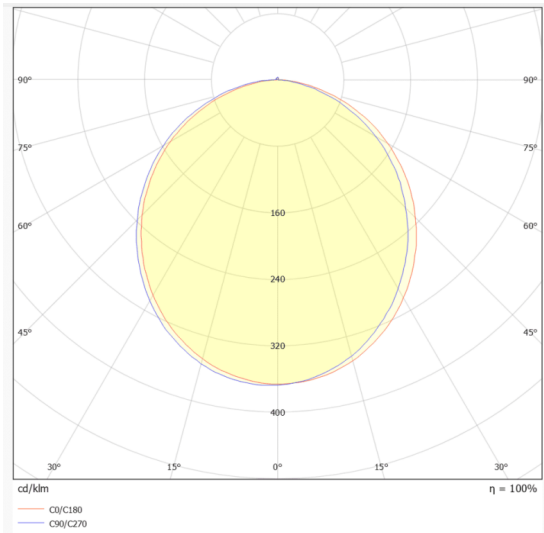

IPLINE

Lavov linear system from the family IPLINE with a power of 31W and a beam angle of 108°. Finished in silver grey colour.

Dimensions L1232mm×W50mm×H80mm. With a total lumen output of 2790lm and a luminous efficacy of 90lm/W. Made in Extruded Aluminium. Driver ON-OFF. CCT 3000K.

|              |  |
|--------------|--|
| Item code    | 86.L004.1301.03  |
| Product type | Indoor   |
| Category     | Linear Systems   |
| Family       | IPLINE   |
| Subfamily    | IPLINE   |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div>CRI<br/>80</div><div>CE</div><div>Driver<br/>INCL.</div><div>On<br/>Off</div><div>1-10V</div><div>50000h<br/>L80B10</div><div>IP<br/>65</div></div> |

|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 31            |
| Real luminous flux (Lm)    | 2790          |
| Luminous efficiency (Lm/W) | 90            |
| Beam angle (°)             | 108           |
| Life time (h)              | 50000h L80B10 |
| IP                         | 65            |
| Colour                     | silver grey   |
| U. G. R                    | 22            |
| Control gear included      | Yes           |
| Control gear               | ON-OFF        |
| Light source               | LED           |
| Type of LED                | SMD           |
| Average life time (h)      | 50000h L80B10 |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM<3        |
| CRI                        | 80            |