



**IPLINE**


Lavov linear system from the family IPLINE with a power of 31W and a beam angle of 108°. Finished in silver grey colour.

Dimensions L1232mm×W50mm×H80mm. With a total lumen output of 3100lm and a luminous efficacy of 100lm/W. Made in Extruded Aluminium. Driver ON-OFF. CCT 4000K.


**Dimensions**

**Product dimensions (mm)** L1232mm×W50mm×H80mm

**Scheme**

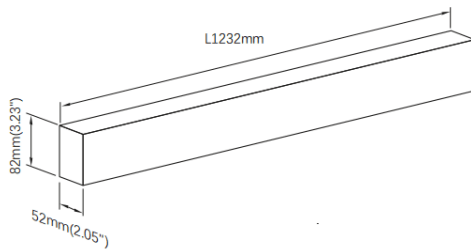

**Photometry**

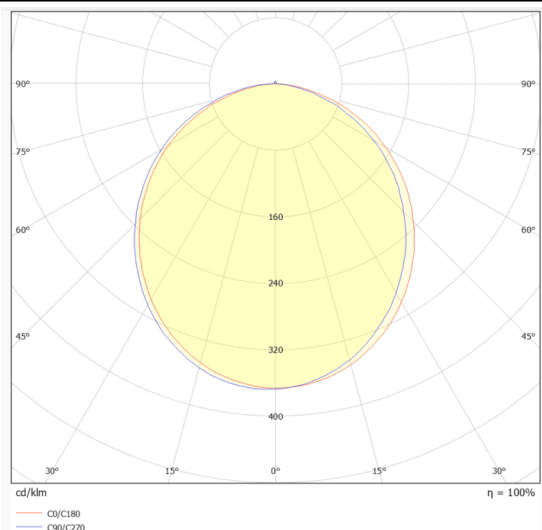

|                     |                        |
|---------------------|------------------------|
| <b>Item code</b>    | <b>86.L004.1401.03</b> |
| <b>Product type</b> | <b>Indoor</b>          |
| <b>Category</b>     | <b>Linear Systems</b>  |
| <b>Family</b>       | <b>IPLINE</b>          |
| <b>Subfamily</b>    | <b>IPLINE</b>          |
| <b>Pictograms</b>   |                        |

|                                   |                      |
|-----------------------------------|----------------------|
| <b>Product</b>                    |                      |
| <b>Real power (W)</b>             | <b>31</b>            |
| <b>Real luminous flux (Lm)</b>    | <b>3100</b>          |
| <b>Luminous efficiency (Lm/W)</b> | <b>100</b>           |
| <b>Beam angle (°)</b>             | <b>108</b>           |
| <b>Life time (h)</b>              | <b>50000h L80B10</b> |
| <b>IP</b>                         | <b>65</b>            |
| <b>Colour</b>                     | <b>silver grey</b>   |
| <b>U. G. R</b>                    | <b>22</b>            |
| <b>Control gear included</b>      | <b>Yes</b>           |
| <b>Control gear</b>               | <b>ON-OFF</b>        |
| <b>Light source</b>               | <b>LED</b>           |
| <b>Type of LED</b>                | <b>SMD</b>           |
| <b>Average life time (h)</b>      | <b>50000h L80B10</b> |
| <b>Colour temperature (K)</b>     | <b>4000</b>          |
| <b>Colour consistency (SDCM)</b>  | <b>SDCM3</b>         |
| <b>CRI</b>                        | <b>80</b>            |