




Dimensions

Product dimensions (mm) L1841mm×W50mm×H80mm

Scheme

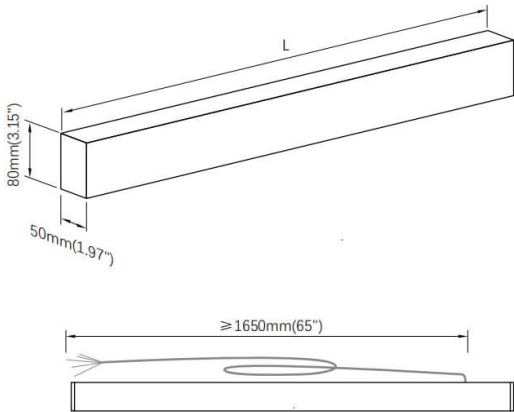

IPLINE

Lavov linear system from the family IPLINE with a power of 46W and an optics 107.7 degrees beam angle. CCT 3000. CRI 80. IP65. opal diffuser . UGR22. With a total lumen output of 4153lm and an efficacy of 90.3lm/W . Made in Extruded Aluminium and finished in Black color. DALI driver.

| | |
|--------------|--|
| Item code | 86.L004.2303.02 |
| Product type | Indoor |
| Category | Linear Systems |
| Family | IPLINE |
| Subfamily | IPLINE |
| Pictograms | <div><div></div><div>220 240 V</div><div>CRI 80</div><div>CE</div><div>Driver INCL.</div></div> <div><div>On Off</div><div>1-10V</div><div>IP 20</div><div>50000h L80B10</div></div> |

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 46 |
| Real luminous flux (Lm) | 4153 |
| Luminous efficiency (Lm/W) | 90.3 |
| Beam angle (°) | 107.7 |
| Life time (h) | 50000h L80B10 |
| IP | 65 |
| Colour | Black |
| U. G. R | 22 |
| Control gear included | Yes |
| Control gear | DALI |
| Light source | LED |
| Type of LED | SMD |
| Average life time (h) | 50000h L80B10 |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |