




**Wall washer shielded**

Lavov linear system from the family Wall washer shielded with a power of 25W and a beam angle of 15° assymmetric. Surface mounted. Finished in Black colour. Dimensions L1000\*W22.5\*H40mm. With a total lumen output of 2250lm and a luminous efficacy of 90lm/W. Made in Extruded Aluminium. Driver not included. CCT 3000K.


**Dimensions**

Product dimensions (mm) **L1000\*W22.5\*H40mm**

**Scheme**

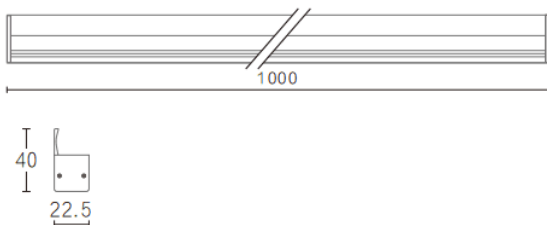

**Photometry**

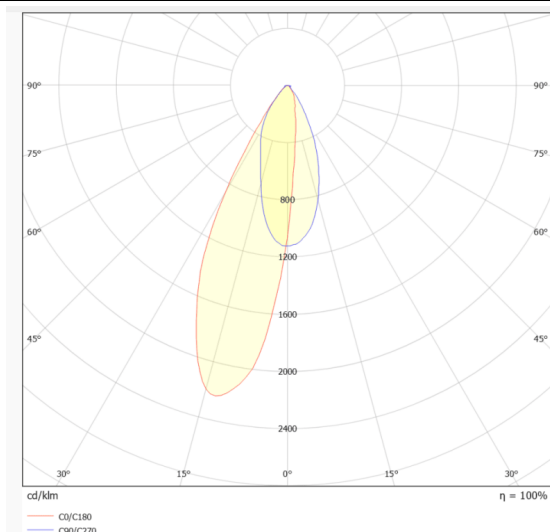

|              |                             |
|--------------|-----------------------------|
| Item code    | <b>86.L005.2253.02</b>      |
| Product type | <b>Indoor</b>               |
| Category     | <b>Linear Systems</b>       |
| Family       | <b>Surface washer</b>       |
| Subfamily    | <b>Wall washer shielded</b> |
| Pictograms   |                             |

|                             |                      |
|-----------------------------|----------------------|
| <b>Product</b>              |                      |
| Real power (W)              | <b>25</b>            |
| Real luminous flux (Lm)     | <b>2250</b>          |
| Luminous efficiency (Lm/W)  | <b>90</b>            |
| Beam angle (°)              | <b>15</b>            |
| Life time (h)               | <b>50000h L80B10</b> |
| Electrical class insulation | <b>Class II</b>      |
| Colour                      | <b>Black</b>         |
| U. G. R                     | <b>22</b>            |
| Control gear included       | <b>No</b>            |
| Control gear                | <b>not included</b>  |
| Power Factor                | <b>no includo</b>    |
| Light source                | <b>LED</b>           |
| Type of LED                 | <b>SMD</b>           |
| Average life time (h)       | <b>50000h L80B10</b> |
| Colour temperature (K)      | <b>3000</b>          |
| Colour consistency (SDCM)   | <b>SDCM3</b>         |
| CRI                         | <b>80</b>            |