


## Wall washer shielded

Lavov linear system from the family Wall washer shielded with a power of 25W and a beam angle of 15º assymmetric. Surface mounted. Finished in White colour. Dimensions L1000*W22.5*H40mm.With a total lumen output of 2500lm and a luminous efficacy of 100lm/W. Made in Extruded Aluminium. Driver not included. CCT 4000K.


| | |
|---|---|
| **Item code** | **86.L005.2451.01** |
| **Product type** | **Indoor** |
| **Category** | **Linear Systems** |
| **Family** | **Surface washer** |
| **Subfamily** | **Wall washer shielded** |
| **Pictograms** | CRI 90 · CE · On Off · DALI · IP 20 · 50000h L80B10 |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **L1000*W22.5*H40mm** |

## Scheme

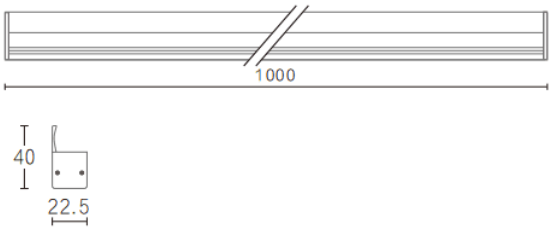


## Photometry

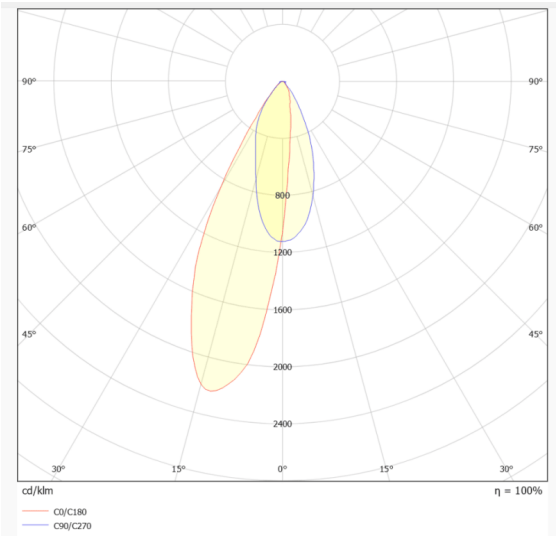


| **Product** | |
|---|---|
| **Real power (W)** | **25** |
| **Real luminous flux (Lm)** | **2500** |
| **Luminous efficiency (Lm/W)** | **100** |
| **Beam angle (º)** | **15** |
| **Life time (h)** | **50000h L80B10** |
| **Electrical class insulation** | **Class II** |
| **Colour** | **White** |
| **U. G. R** | **22** |
| **Control gear included** | **No** |
| **Control gear** | **not included** |
| **Power Factor** | **no incluido** |
| **Light source** | **LED** |
| **Type of LED** | **SMD** |
| **Average life time (h)** | **50000h L80B10** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |