





Scheme



Photometry



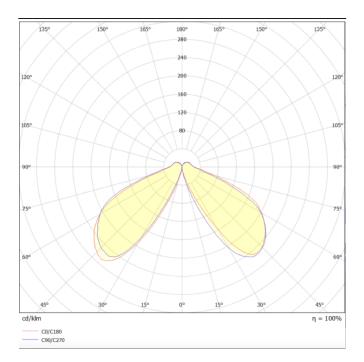

CONE

Outdoor Bollards from the family CONE with a power of 10W and an Assymetric lighting distribution. Dimmensions pole diam. 118mm and 500mm height. Real lumen output of 600lm and an efficiency of 60 Im/W . With a CCT of 3000 K. IP65 and IK08 degree of protection. Made in Die Cast Aluminium Body, Extruded Aluminum Pole and finished in Black color.ON-OFF driver.

Item code	86.OB06.1311.02 Outdoor	
Product type		
Category	Bollards	
Family	CONE	
Pictograms	50 Hz 220 V	
	SDCM 3 C € Driver 50000h 170B10	
	IP 1K 08	

Product	
Real power (W)	10
Real luminous flux (Lm)	600
Luminous efficiency (Lm/W)	60
Beam angle (º)	Assymetric
Life time (h)	50000h L70B10
IP	65
Electrical class insulation	Class I
Colour	Black
Chip Brand	SUNPU
Control gear included	yes
Control gear	ON-OFF
Light source	LED
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	75
IK	IK08