





Scheme

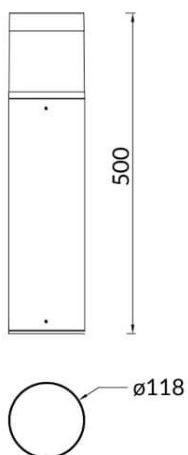

Photometry

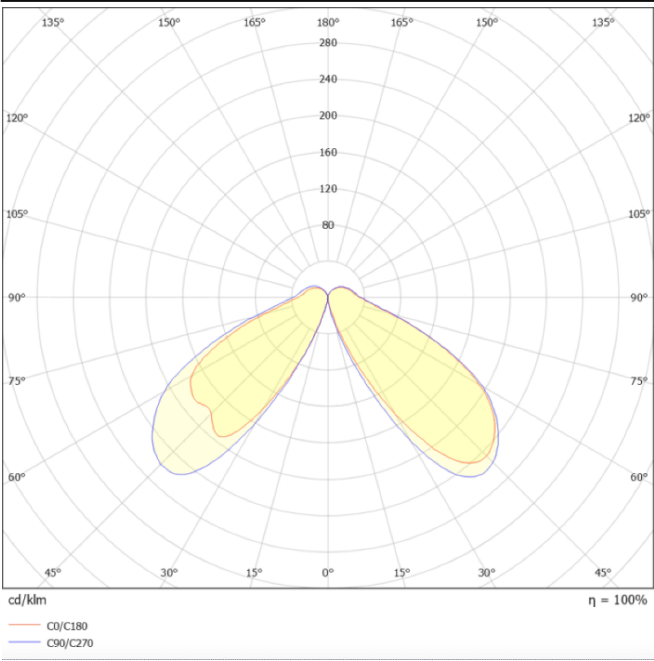

CONE COVER

Outdoor Bollards from the family CONE COVER with a power of 12W and an Assymetric lighting distribution. Dimmensions pole diam. 118mm and 500mm height. Real lumen output of 800lm and an efficiency of 66.67lm/W . With a CCT of 3000K. IP65 and IK08 degree of protection. Made in Die Cast Aluminium Body, Extruded Aluminum Pole and finished in Black color.ON-OFF driver.

| | |
|--------------|--|
| Item code | 86.OB07.1311.02 |
| Product type | Outdoor |
| Category | Bollards |
| Family | CONE COVER |
| Pictograms | <div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>850°</div><div>CRI 80</div></div> <div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>50000h L70B10</div></div> <div><div>IP 65</div><div>IK 08</div></div> |

| | |
|-----------------------------|---------------|
| Product | |
| Real power (W) | 12 |
| Real luminous flux (Lm) | 800 |
| Luminous efficiency (Lm/W) | 66.67 |
| Beam angle (°) | Assymetric |
| Life time (h) | 50000h L70B10 |
| IP | 65 |
| Electrical class insulation | Class I |
| Colour | Black |
| Chip Brand | SUNPU |
| Control gear included | yes |
| Control gear | ON-OFF |
| Light source | LED |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 75 |
| IK | IK08 |