





Scheme

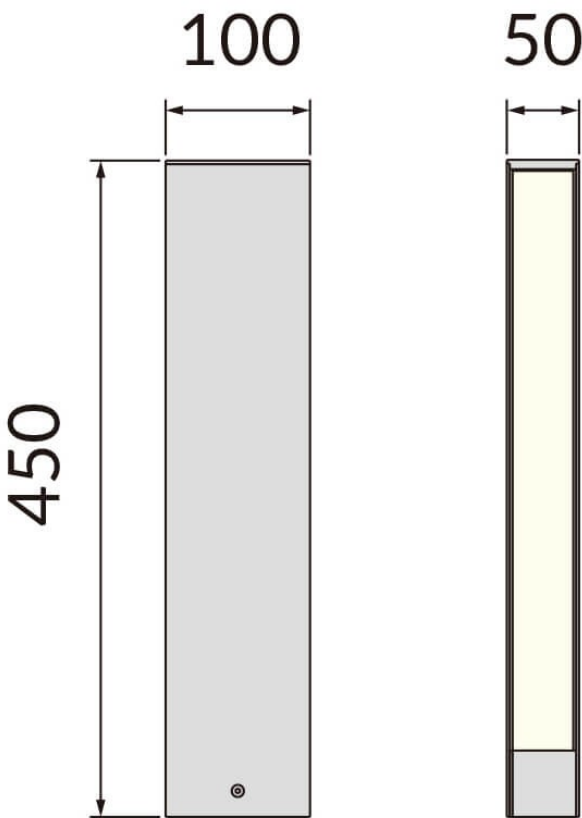

Photometry

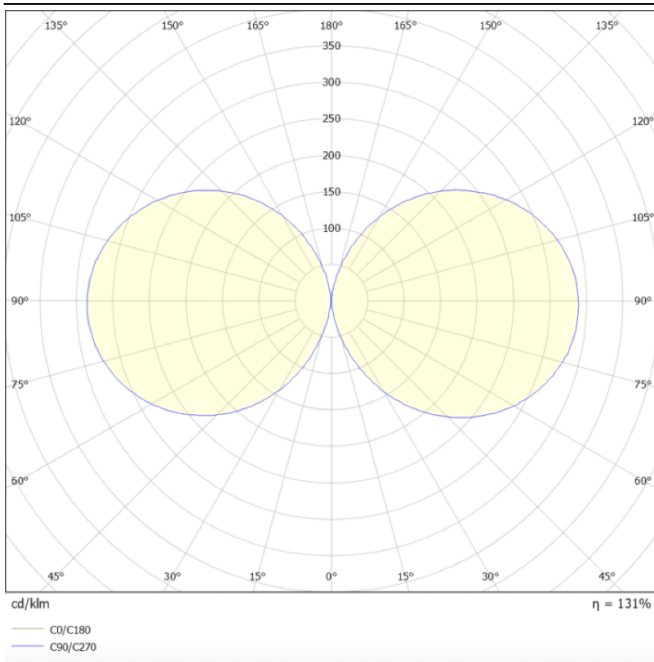

RECTANGLE

Outdoor Bollards from the family RECTANGLE with a power of 15W and an Assymetric lighting distribution. Dimmensions pole 50x100mm and 450mm height. Real lumen output of 820lm and an efficiency of 54.67lm/W . With a CCT of 3000K. IP65 and IK08 degree of protection. Made in Die Cast Aluminium Body, Extruded Aluminum Pole and finished in Black color.ON-OFF driver.

Item code	86.OB08.1311.02
Product type	Outdoor
Category	Bollards
Family	RECTANGLE
Pictograms	50 60 Hz 220 240 V 850° CRI 80 SDCM 3 Driver INCL. 50000h L70B10 IP 65 IK 08

Product	
Real power (W)	15
Real luminous flux (Lm)	820
Luminous efficiency (Lm/W)	54.67
Beam angle (°)	Assymetric
Life time (h)	50000h L70B10
IP	65
Electrical class insulation	Class I
Colour	Black
Chip Brand	SUNPU
Control gear included	yes
Control gear	ON-OFF
Light source	LED
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	75
IK	IK08