




Scheme



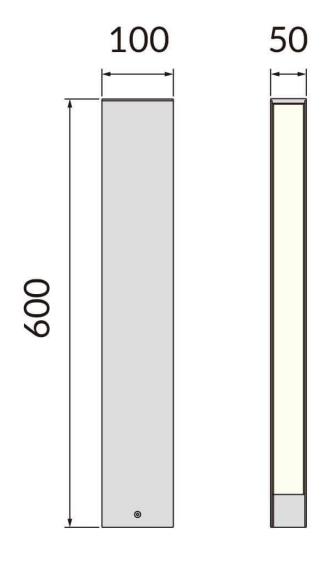

RECTANGLE

Outdoor Bollards from the family RECTANGLE with a power of 25W and an Assymetric lighting distribution. Dimmensions pole 50x100mm and 600mm height. Real lumen output of 1320lm and an efficiency of 52.8lm/W . With a CCT of 3000K. IP65 and IK08 $\,$ degree of protection. Made in Die Cast Aluminium Body, Extruded Aluminum Pole and finished in Black color.ON-OFF driver.

86.0	86.OB08.2311.02					
Outd	Outdoor					
Bolla	Bollards					
RECT	RECTANGLE					
	50 60 Hz	²²⁰ ₂₄₀ V	∑ 850°	CRI 80		
SDCM 3	C€	Driver INCL.		50000h L70 B 10		
IP 65	IK 08					
	Outd Bolla RECT	Outdoor Bollards RECTANGL 50 Hz SDCM 3 C €	Outdoor Bollards RECTANGLE \$\begin{array}{ccccc} \delta_0 & \text{P} & \text{Driver} & \text{INCL} & \text{Driver} & \text{INCL} & I	Outdoor Bollards RECTANGLE 50 Hz 220 V Soc SDCM 3 C C Driver INCL	Outdoor Bollards RECTANGLE \$\begin{array}{cccccccccccccccccccccccccccccccccccc	

Product			
Real power (W)	25		
Real luminous flux (Lm)	1320		
Luminous efficiency (Lm/W)	52.8		
Beam angle (º)	Assymetric		
Life time (h)	50000h L70B10		
IP	65		
Electrical class insulation	Class I		
Colour	Black		
Chip Brand	SUNPU		
Control gear included	yes		
Control gear	ON-OFF		
Light source	LED		
Colour temperature (K)	3000		
Colour consistency (SDCM)	SDCM<3		
CRI	75		
IK	IK08		

Photometry

