


PATH

Lavov bollard from the familly Path with a power of 25W and an optic of Assymetric type V. with a real lumen output of 2500lm and an efficiency of 100lm/W with a CCT of 3000K, made in Extruded Aluminium, die cast body, and finished in Black color. ON-OFF+ pressence detector driver. Degree of protection IP66 and IKIK10.

Item code	**86.OB10.2312.02**
Product type	**Outdoor**
Category	**Bollards**
Family	**PATH**
Pictograms	


Dimensions	
Product dimensions (mm)	**Φ135×1000mm**

Scheme

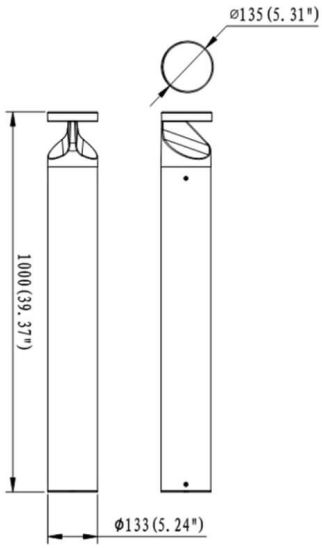

Product	
Real power (W)	**25**
Real luminous flux (Lm)	**2500**
Luminous efficiency (Lm/W)	**100**
Beam angle (º)	**Assymetric type V**
Life time (h)	**50000h L70B10**
IP	**66**
Electrical class insulation	**Class I**
Colour	**Black**
Control gear included	**yes**
Control gear	**ON-OFF+ pressence detector**
Light source	**LED**
Type of LED	**SMD**
Colour temperature (K)	**3000**
Colour consistency (SDCM)	**SDCM3**
CRI	**80**
IK	**IK10**

Photometry

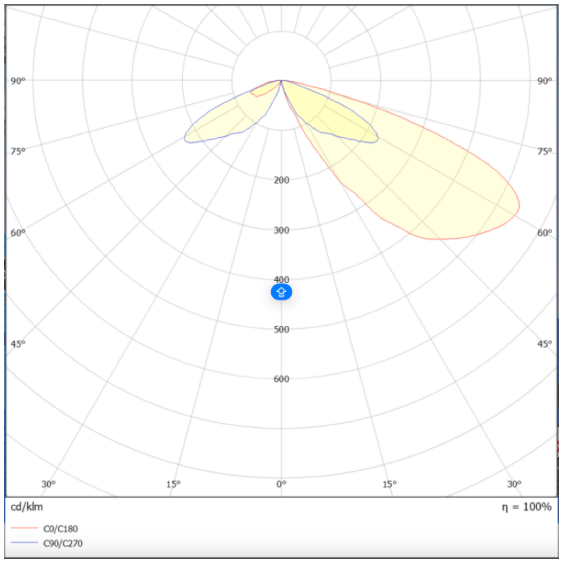
90°
90°
75°
75°
200
300
60°
60°
400
500
45°
45°
600
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0/C180
C90/C270