


PILAR

Surface Ceiling Downlight fixture from the family PILAR with a power of 21 W and a 12 degrees beam angle. With a real lumen output of 1705lm and a luminous efficiency of 81.19lm/W. Made in Die Cast Aluminium Body, Front Cover Tempered Glass with an IP65 and an IK06 degree of protection. Finished in Black color. ON-OFF driver included

Item code	86.OC01.1311.02
Product type	Outdoor
Category	Surface Ceiling Downlight
Family	PILAR
Pictograms	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>

Scheme

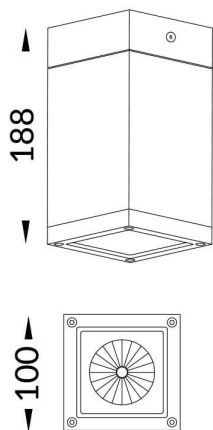

Product	
Real power (W)	21
Real luminous flux (Lm)	1705
Luminous efficiency (Lm/W)	81.19
Beam angle (°)	12
Life time (h)	50000h L80B10
IP	65
Electrical class insulation	Class I
Colour	Black
Control gear included	Yes
Control gear	ON-OFF
Type of LED	1*18W Nichia COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	>80
IK	06