


**PILAR**

Surface Ceiling Downlight fixture from the family PILAR with a power of 21 W and a 18 degrees beam angle. With a real lumen output of 1705lm and a luminous efficiency of 81.19lm/W. Made in Die Cast Aluminium Body, Front Cover Tempered Glass with an IP65 and an IK06 degree of protection. Finished in White color. ON-OFF driver included

<b>Item code</b>	<b>86.OC01.1321.01</b>
<b>Product type</b>	<b>Outdoor</b>
<b>Category</b>	<b>Surface Ceiling Downlight</b>
<b>Family</b>	<b>PILAR</b>
<b>Pictograms</b>	

**Scheme**

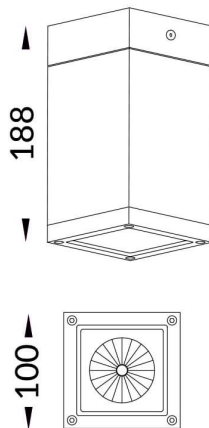

<b>Product</b>	
<b>Real power (W)</b>	<b>21</b>
<b>Real luminous flux (Lm)</b>	<b>1705</b>
<b>Luminous efficiency (Lm/W)</b>	<b>81.19</b>
<b>Beam angle (°)</b>	<b>18</b>
<b>Life time (h)</b>	<b>50000h L80B10</b>
<b>IP</b>	<b>65</b>
<b>Electrical class insulation</b>	<b>Class I</b>
<b>Colour</b>	<b>White</b>
<b>Chip Brand</b>	<b>Nichia</b>
<b>Control gear included</b>	<b>Yes</b>
<b>Control gear</b>	<b>ON-OFF</b>
<b>Light source</b>	<b>LED</b>
<b>Type of LED</b>	<b>1*18W Nichia COB</b>
<b>Colour temperature (K)</b>	<b>3000</b>
<b>Colour consistency (SDCM)</b>	<b>SDCM&lt;3</b>
<b>CRI</b>	<b>&gt;80</b>
<b>IK</b>	<b>IK06</b>

**Photometry**

