

---

**SURFACE CEILING DOWNLIGHT -  
PILAR**

**Item code 86.OC01.1321.01**

**LAVOV**  
LIGHTING



---

**Scheme**

---




---

**Photometry**





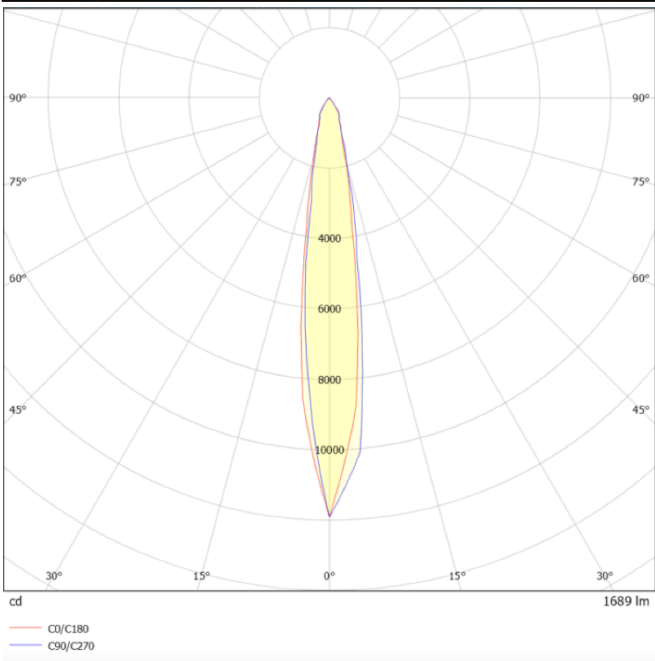





**SURFACE CEILING DOWNLIGHT -  
PILAR**

Item code 86.OC01.1321.01



**PILAR**

Surface Ceiling Downlight fixture from the family PILAR with a power of 19.5 W and a 24 degrees beam angle. With a real lumen output of 2098lm and a luminous efficiency of 107.6lm/W. Made in Die Cast Aluminium Body, Front Cover Tempered Glass with an IP65 and an IK06 degree of protection. Finished in White color. ON-OFF driver included

Item code	86.OC01.1321.01
Product type	Outdoor
Category	Surface Ceiling Downlight
Family	PILAR
Pictograms	<div><div>50 Hz 60</div><div>220 V 240</div><div>850°</div><div>CRI 80</div><div>SDCM 3</div><div></div><div>Driver INCL.</div><div>50000h L80B10</div><div>IP 65</div><div>IK 06</div></div>

Product	
Real power (W)	19.5
Real luminous flux (Lm)	2098
Luminous efficiency (Lm/W)	107.6
Beam angle (°)	24
Life time (h)	50000h L80B10
IP	65
Electrical class insulation	Class I
Colour	White
Control gear included	Yes
Control gear	ON-OFF
Light source	LED
Type of LED	1*18WNichia COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	>80
IK	IK06