





PILAR

Surface Ceiling Downlight fixture from the family PILAR with a power of 19.5 W and a 24 degrees beam angle. With a real lumen output of 2098lm and a luminous efficiency of 107.6lm/W. Made in Die Cast Aluminium Body, Front Cover Tempered Glass with an IP65 and an IK06 degree of protection. Finished in Black color.
ON-OFF driver included

Scheme

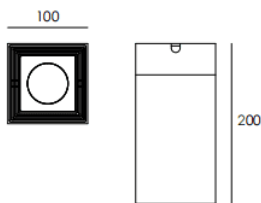

Photometry

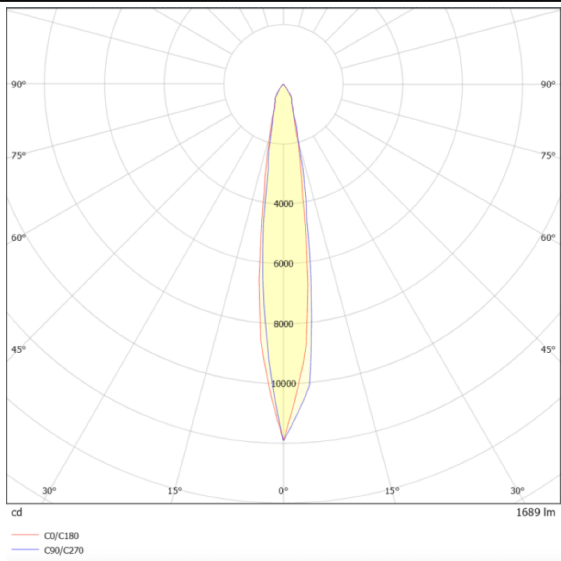

Item code	86.OC01.1321.02
Product type	Outdoor
Category	Surface Ceiling Downlight
Family	PILAR
Pictograms	

Product	
Real power (W)	19.5
Real luminous flux (Lm)	2098
Luminous efficiency (Lm/W)	107.6
Beam angle (°)	24
Life time (h)	50000h L80B10
IP	65
Electrical class insulation	Class I
Colour	Black
Control gear included	Yes
Control gear	ON-OFF
Light source	LED
Type of LED	1*18WNichia COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	>80
IK	IK06