


PILAR

Surface Ceiling Downlight fixture from the family PILAR with a power of 21 W and a 18 degrees beam angle. With a real lumen output of 1705lm and a luminous efficiency of 81.19lm/W. Made in Die Cast Aluminium Body, Front Cover Tempered Glass with an IP65 and an IK06 degree of protection. Finished in Grey color. DALI driver included

Item code	86.OC01.1323.03
Product type	Outdoor
Category	Surface Ceiling Downlight
Family	PILAR
Pictograms	<div><div></div><div>50 60 Hz</div><div>220 240 V</div><div> 850°</div><div>CRI 80</div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>50000h L80B10</div><div>IP 65</div><div>IK 06</div></div>

Scheme

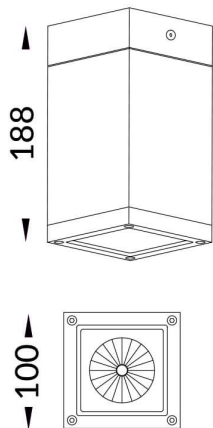

Product	
Real power (W)	21
Real luminous flux (Lm)	1705
Luminous efficiency (Lm/W)	81.19
Beam angle (°)	18
Life time (h)	50000h L80B10
IP	65
Electrical class insulation	Class I
Colour	Grey
Control gear included	Yes
Control gear	DALI
Type of LED	1*18W Nichia COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	>80
IK	06