

**SURFACE CEILING DOWNLIGHT -
PILAR**

Item code 86.OC01.1331.02

LAVOV
LIGHTING



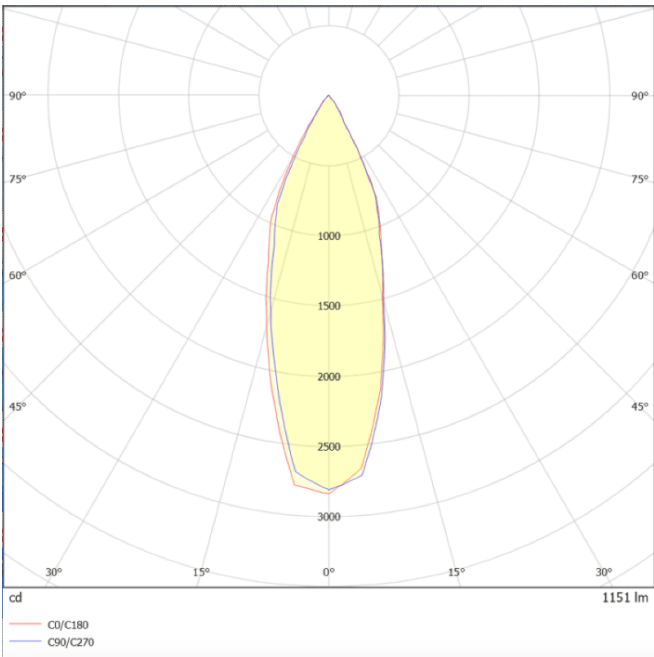
Scheme



Photometry

**SURFACE CEILING DOWNLIGHT -
PILAR**

Item code 86.OC01.1331.02



PILAR

Surface Ceiling Downlight fixture from the family PILAR with a power of 19.5 W and a 36 degrees beam angle. With a real lumen output of 2098lm and a luminous efficiency of 107.6lm/W. Made in Die Cast Aluminium Body, Front Cover Tempered Glass with an IP65 and an IK06 degree of protection. Finished in Black color. ON-OFF driver included

Item code	86.OC01.1331.02
Product type	Outdoor
Category	Surface Ceiling Downlight
Family	PILAR
Pictograms	<div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>CRI 80</div></div> <div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>50000h L80B10</div></div> <div><div>IP 65</div><div>IK 06</div></div>

Product	
Real power (W)	19.5
Real luminous flux (Lm)	2098
Luminous efficiency (Lm/W)	107.6
Beam angle (°)	36
Life time (h)	50000h L80B10
IP	65
Electrical class insulation	Class I
Colour	Black
Control gear included	Yes
Control gear	ON-OFF
Light source	LED
Type of LED	1*18W Nichia COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	>80
IK	IK06