

**SURFACE CEILING DOWNLIGHT -  
PILAR**

**Item code 86.OC01.1331.02**


**LAVOV**  
LIGHTING



---


**Scheme**

---

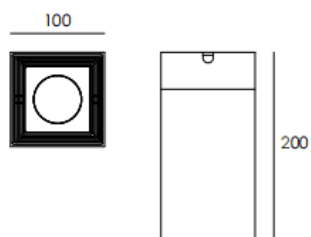




---

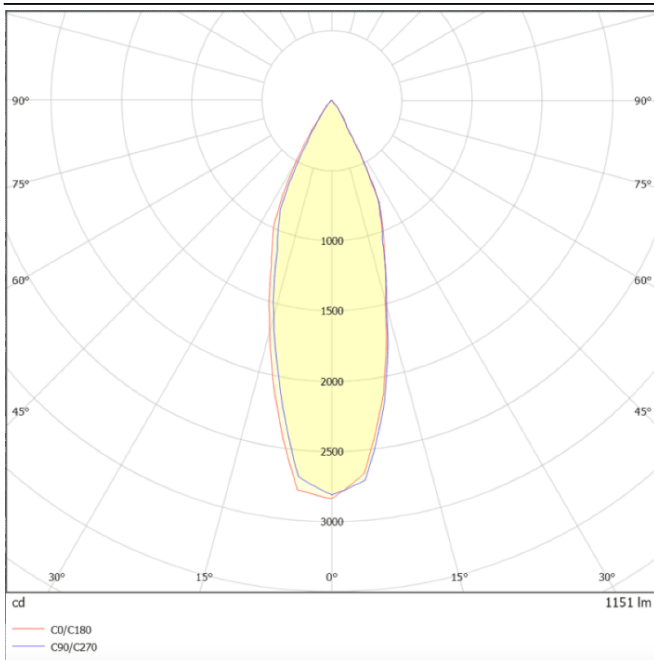**Photometry**



**PILAR**

Surface Ceiling Downlight fixture from the family PILAR with a power of 19.5 W and a 36 degrees beam angle. With a real lumen output of 2098lm and a luminous efficiency of 107.6lm/W. Made in Die Cast Aluminium Body, Front Cover Tempered Glass with an IP65 and an IK06 degree of protection. Finished in Black color. ON-OFF driver included

Item code	86.OC01.1331.02
Product type	Outdoor
Category	Surface Ceiling Downlight
Family	PILAR
Pictograms	<div><div></div><div>50 60 Hz</div><div>220 240 V</div><div>850°</div><div>CRI 80</div></div> <div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>50000h L80B10</div></div> <div><div>IP 65</div><div>IK 06</div></div>

<b>Product</b>	
<b>Real power (W)</b>	<b>19.5</b>
<b>Real luminous flux (Lm)</b>	<b>2098</b>
<b>Luminous efficiency (Lm/W)</b>	<b>107.6</b>
<b>Beam angle (°)</b>	<b>36</b>
<b>Life time (h)</b>	<b>50000h L80B10</b>
<b>IP</b>	<b>65</b>
<b>Electrical class insulation</b>	<b>Class I</b>
<b>Colour</b>	<b>Black</b>
<b>Control gear included</b>	<b>Yes</b>
<b>Control gear</b>	<b>ON-OFF</b>
<b>Light source</b>	<b>LED</b>
<b>Type of LED</b>	<b>1*18W Nichia COB</b>
<b>Colour temperature (K)</b>	<b>3000</b>
<b>Colour consistency (SDCM)</b>	<b>SDCM&lt;3</b>
<b>CRI</b>	<b>&gt;80</b>
<b>IK</b>	<b>IK06</b>