




**Dimensions**

**Product dimensions (mm)**      **diam 83x131mm**

**Scheme**

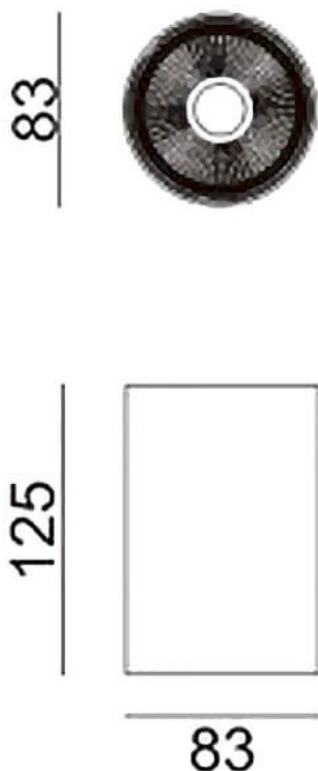

## SDOWN

Lavov outdoor wall light from the family SDOWN with a power of 15W and a optic distribution 40°. With a total lumen output of 1150lm and an efficiency of 76,67lm/W. Manufactured in Die Cast Aluminium Body, Front Cover Tempered Glass and finished in Black colour. ON-OFF driver.

|                     |  |
|---------------------|--|
| <b>Item code</b>    | <b>86.OC02.1331.02</b>   |
| <b>Product type</b> | <b>Outdoor</b>   |
| <b>Category</b>     | <b>Surface Ceiling Downlight</b>   |
| <b>Family</b>       | <b>SDOWN</b>   |
| <b>Pictograms</b>   | <div> <div>  50<br/>60 Hz </div> <div>  220<br/>240 V </div> <div>  850° </div> <div>  CRI<br/>80 </div> <div>  SDCM<br/>3 </div> <div>  CE </div> <div>  Driver<br/>INCL. </div> <div>  50000h<br/>L80B10 </div> <div>  IP<br/>65 </div> <div>  IK<br/>06 </div> </div> |

|                                    |                      |
|------------------------------------|----------------------|
| <b>Product</b>                     |                      |
| <b>Real power (W)</b>              | <b>15</b>            |
| <b>Real luminous flux (Lm)</b>     | <b>1150</b>          |
| <b>Luminous efficiency (Lm/W)</b>  | <b>76.67</b>         |
| <b>Beam angle (°)</b>              | <b>40°</b>           |
| <b>Life time (h)</b>               | <b>50000h L80B10</b> |
| <b>IP</b>                          | <b>65</b>            |
| <b>Electrical class insulation</b> | <b>Class I</b>       |
| <b>Colour</b>                      | <b>Black</b>         |
| <b>Chip Brand</b>                  | <b>Osram</b>         |
| <b>Control gear included</b>       | <b>Yes</b>           |
| <b>Control gear</b>                | <b>ON-OFF</b>        |
| <b>Light source</b>                | <b>LED</b>           |
| <b>Type of LED</b>                 | <b>COB</b>           |
| <b>Colour temperature (K)</b>      | <b>3000</b>          |
| <b>Colour consistency (SDCM)</b>   | <b>SDCM&lt;3</b>     |
| <b>CRI</b>                         | <b>&gt;80</b>        |
| <b>IK</b>                          | <b>IK06</b>          |