





Dimensions

Product dimensions (mm) diam 123x156mm

Scheme

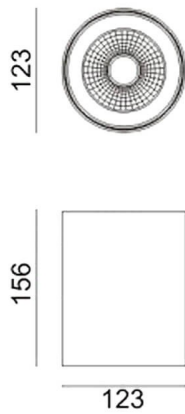

Photometry

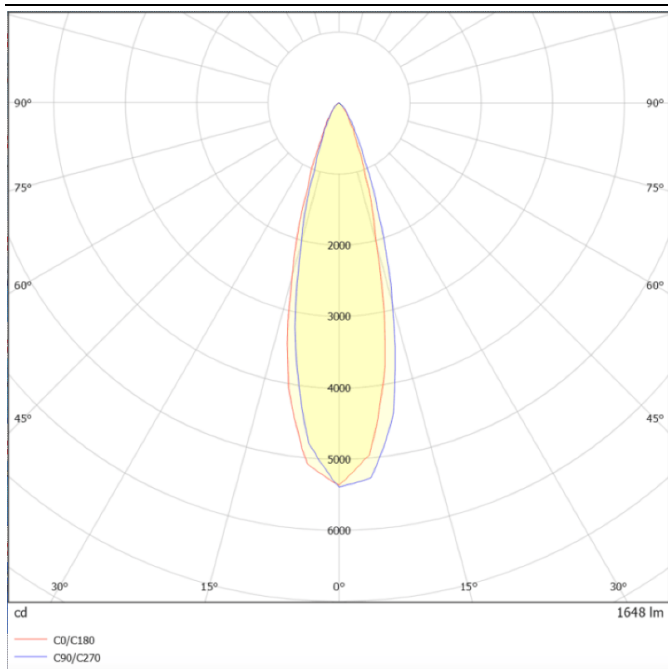

SDOWN

Lavov outdoor wall light from the family SDOWN with a power of 20W and a optic distribution 25°. With a total lumen output of 1600lm and an efficiency of 80lm/W. Manufactured in Die Cast Aluminium Body, Front Cover Tempered Glass and finished in Grey colour. ON-OFF driver.

| | |
|---------------------|----------------------------------|
| Item code | 86.OC02.2321.03 |
| Product type | Outdoor |
| Category | Surface Ceiling Downlight |
| Family | SDOWN |
| Pictograms | |

| | |
|------------------------------------|----------------------|
| Product | |
| Real power (W) | 20 |
| Real luminous flux (Lm) | 1600 |
| Luminous efficiency (Lm/W) | 80 |
| Beam angle (°) | 25° |
| Life time (h) | 50000h L80B10 |
| IP | 65 |
| Electrical class insulation | Class I |
| Colour | Grey |
| Chip Brand | Osram |
| Control gear included | Yes |
| Control gear | ON-OFF |
| Light source | LED |
| Type of LED | COB |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | >80 |
| IK | IK06 |