




SDOWN

Lavov outdoor wall light from the family SDOWN with a power of 50W and a optic distribution 25°. With a total lumen output of 4450lm and an efficiency of 89lm/W. Manufactured in Die Cast Aluminium Body, Front Cover Tempered Glass and finished in Black colour. ON-OFF driver.

| | | | | | |
|--------------|--|--|--|--|--|
| Item code | 86.OC02.4321.02 | | | | |
| Product type | Outdoor | | | | |
| Category | Surface Ceiling Downlight | | | | |
| Family | SDOWN | | | | |
| Pictograms | <div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>850°</div><div>CRI 80</div></div> <div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>50000h L80B10</div></div> <div><div>IP 65</div><div>IK 06</div></div> | | | | |

Scheme

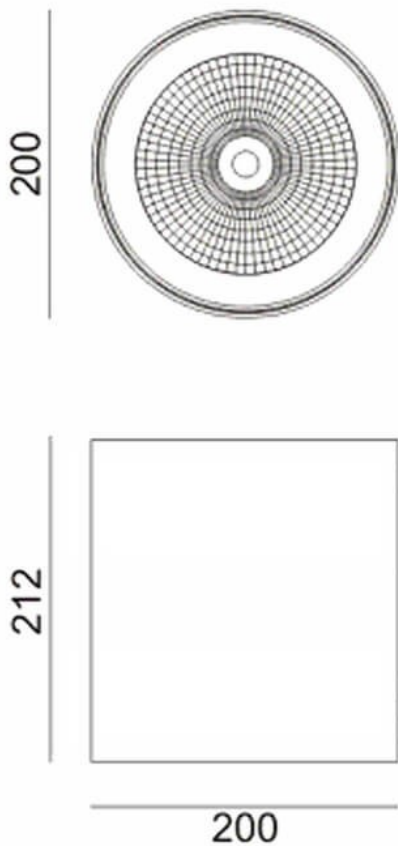

| | |
|-----------------------------|---------------|
| Product | |
| Real power (W) | 50 |
| Real luminous flux (Lm) | 4450 |
| Luminous efficiency (Lm/W) | 89 |
| Beam angle (°) | 25° |
| Life time (h) | 50000h L80B10 |
| IP | 65 |
| Electrical class insulation | Class I |
| Colour | Black |
| Chip Brand | Osram |
| Control gear included | Yes |
| Control gear | ON-OFF |
| Light source | LED |
| Type of LED | COB |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | >80 |
| IK | IK06 |