SURFACE CEILING DOWNLIGHT -SDOWN

Item code 86.0C02.4321.03






SDOWN

Lavov outdoor wall light from the family SDOWN with a power of 50W and a optic distribution 25°. With a total lumen output of 4450lm and an efficiency of 89lm/W. Manufactured in Die Cast Aluminium Body, Front Cover Tempered Glass and finished in Grey colour. ON-OFF driver.

| Item code | 86.OC02.4321.03 Outdoor Surface Ceiling Downlight | |
|--------------|---|--|
| Product type | | |
| Category | | |
| Family | SDOWN | |
| Pictograms | (=) 50 Hz 220 V 60 Hz 240 V 80 CRI 80 | |
| | SDCM 3 CE Driver INCL 50000h L80B10 | |
| | IP IK 65 06 | |

Scheme

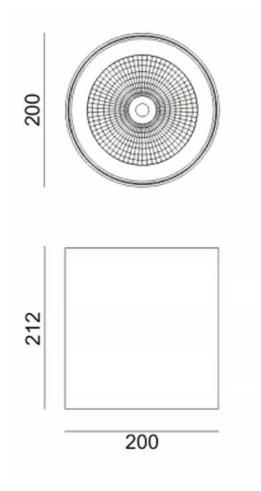

| Product | |
|-----------------------------|---------------|
| Real power (W) | 50 |
| Real luminous flux (Lm) | 4450 |
| Luminous efficiency (Lm/W) | 89 |
| Beam angle (º) | 25º |
| Life time (h) | 50000h L80B10 |
| IP | 65 |
| Electrical class insulation | Class I |
| Colour | Grey |
| Chip Brand | Osram |
| Control gear included | Yes |
| Control gear | ON-OFF |
| Light source | LED |
| Type of LED | СОВ |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | >80 |
| ІК | IK06 |

