




Dimensions

Product dimensions (mm)	diam 200x212mm
--------------------------------	-----------------------

Scheme

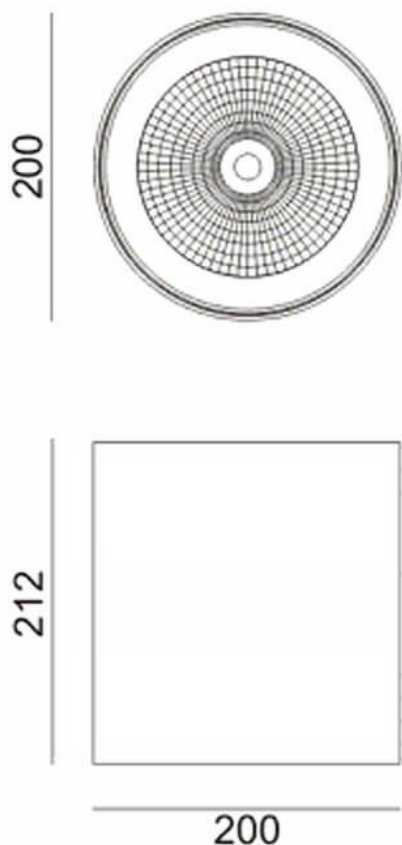

SDOWN

Lavov outdoor wall light from the family SDOWN with a power of 50W and a optic distribution 25°. With a total lumen output of 4450lm and an efficiency of 89lm/W. Manufactured in Die Cast Aluminium Body, Front Cover Tempered Glass and finished in White colour. DALI driver.

Item code	86.OC02.4323.01
Product type	Outdoor
Category	Surface Ceiling Downlight
Family	SDOWN
Pictograms	<div> <div> </div> <div> 50 60 Hz </div> <div> 220 240 V </div> <div> 850° </div> <div> CRI 80 </div> </div> <div> SDCM 3 </div> <div> CE </div> <div> Driver INCL. </div> <div> </div> <div> 50000h L80B10 </div>

IP
65

IK
06

Product	
Real power (W)	50
Real luminous flux (Lm)	4450
Luminous efficiency (Lm/W)	89
Beam angle (°)	25°
Life time (h)	50000h L80B10
IP	65
Electrical class insulation	Class I
Colour	White
Chip Brand	Osram
Control gear included	Yes
Control gear	DALI
Light source	LED
Type of LED	COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	>80
IK	IK06