





Scheme

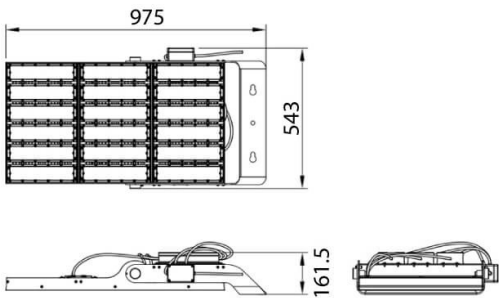

Photometry

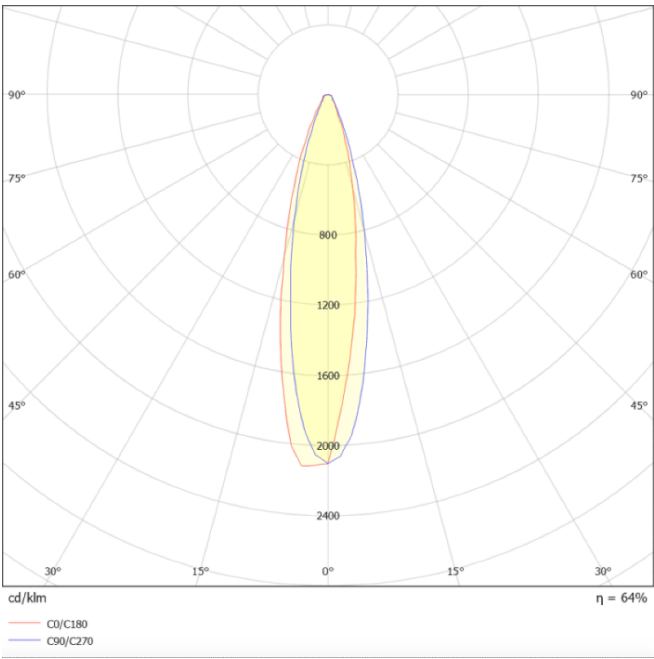

AREA

Lavov floodlight from the family AREA with a power of 900W and a 20 degrees beam angle . With a real lumen output of 126000lm and a luminous efficiency of 140lm/W. CRI >75, CCT 5000K. degree of protection. Made in Body Aluminium alloy materials - AL6063 and Steel Q235 with powder coating. PC lenses. and finished in grey color. Driver ON-OFF.

| | |
|--------------|-----------------|
| Item code | 86.OF02.7511.03 |
| Product type | Outdoor |
| Category | Floodlights |
| Family | AREA |
| Pictograms | |

| | |
|----------------------------|-----------------------|
| Product | |
| Real power (W) | 900 |
| Real luminous flux (Lm) | 126000 |
| Luminous efficiency (Lm/W) | 140 |
| Beam angle (°) | 20 |
| IP | IP65 |
| Colour | grey |
| Control gear included | yes |
| Control gear | ON-OFF |
| Light source | LED |
| Type of LED | NF2W757GR-V3 |
| Average life time (h) | Up to 100,000hrs LM70 |
| Colour temperature (K) | 5000K |
| Colour consistency (SDCM) | <5 |
| CRI | 75 |
| IK | IK10 |