



SAFE

Lavov outdoor floodlight from the family SAFE with a power of 50W and an optic of 25°. . With a totsl lumen output of 7250 lm and an efficiency of 145lm/W. Manufactured in die cast aluminium alloy with low cooper content perfect for agressive environements and finished in powder coating in black color. Degree of protection IP66 and IK08. ON-OFF driver.

Item code	86.OF03.1421.02				
Product type	Outdoor				
Category	Floodlights				
Family	SAFE				
Pictograms					

Product	
Real power (W)	50
Real luminous flux (Lm)	7250
Luminous efficiency (Lm/W)	145
Beam angle (°)	25°
IP	IP66
Operating temperature	-30°C to + 50°C
Colour	black
Control gear included	yes
Control gear	ON-OFF
Power Factor	>0,95
Flicker Free	YES
Light source	LED
Average life time (h)	Up to 100,000hrs LM70
Colour temperature (K)	4000K
Colour consistency (SDCM)	<5
CRI	70
IK	IK08


Technical details	
Material	Aluminium alloy
Finish	Powder coating
Weight	0.8 kg
Mounting	Wall mount
Warranty	3 years

Accessories	
Mounting bracket	Yes
Wiring cable	Yes
Wiring cable length	1.5 m

Certifications	
CE mark	Yes
RoHS	Yes
REACH	Yes

Notes	
1	For more information, please contact our technical support team.

Dimensions	
Product dimensions (mm)	353x287x65mm
Scheme	

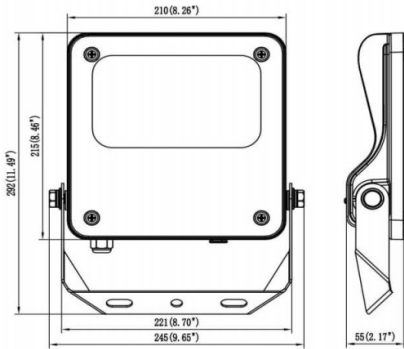

50W