




SAFE

Lavov outdoor floodlight from the family SAFE with a power of 50W and an optic of 60°. With a total lumen output of 7250 lm and an efficiency of 145lm/W. Manufactured in die cast aluminium alloy with low cooper content perfect for aggressive environments and finished in powder coating in black color. Degree of protection IP66 and IK08. ON-OFF driver.

Dimensions

Product dimensions (mm) 353x287x65mm

Scheme

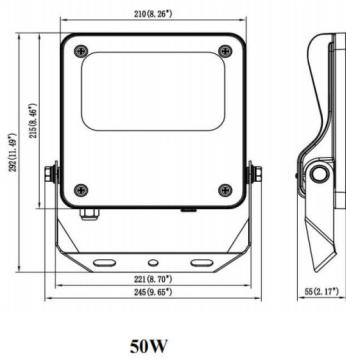

| | |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item code | 86.OF03.1431.02 |
| Product type | Indoor |
| Category | Industrial |
| Family | SAFE |
| Pictograms |         |

Product

| | |
|-----------------------------------|-----------------------|
| Real power (W) | 50 |
| Real luminous flux (Lm) | 7250 |
| Luminous efficiency (Lm/W) | 145 |
| Beam angle (°) | 60° |
| IP | IP66 |
| Operating temperature | -30°C to + 50°C |
| Colour | black |
| Control gear included | yes |
| Control gear | ON-OFF |
| Power Factor | >0,95 |
| Flicker Free | YES |
| Light source | LED |
| Average life time (h) | Up to 100,000hrs LM77 |
| Colour temperature (K) | 4000K |
| Colour consistency (SDCM) | <5 |
| CRI | 70 |
| IK | IK08 |