











SAFE

Lavov outdoor floodlight from the family SAFE with a power of 100W and an optic of 60°. . With a totsl lumen output of 14500 lm and an efficiency of 145lm/W. Manufactured in die cast aluminium alloy with low cooper content perfect for agressive environements and finished in powder coating in black color. Degree of protection IP66 and IK08. ON-OFF driver.


| | |
|--------------|--|
| Item code | 86.OF03.3431.02 |
| Product type | Outdoor |
| Category | Floodlights |
| Family | SAFE |
| Pictograms |         |

| | |
|----------------------------|-----------------------|
| Product | |
| Real power (W) | 100 |
| Real luminous flux (Lm) | 14500 |
| Luminous efficiency (Lm/W) | 145 |
| Beam angle (°) | 60° |
| IP | IP66 |
| Operating temperature | -30°C to + 50°C |
| Colour | black |
| Control gear included | yes |
| Control gear | ON-OFF |
| Power Factor | >0,97 |
| Flicker Free | YES |
| Light source | LED |
| Average life time (h) | Up to 100,000hrs LM79 |
| Colour temperature (K) | 4000K |
| Colour consistency (SDCM) | <5 |
| CRI | 70 |
| IK | IK08 |

Dimensions

Product dimensions (mm) 447x359x75mm

Scheme

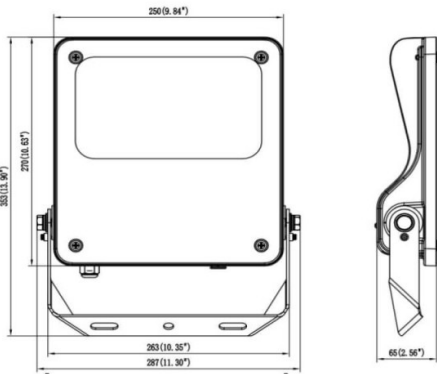

80W/100W