




### SAFE

Lavov outdoor floodlight from the family SAFE with a power of 100W and an optic of 60°. . With a total lumen output of 14500 lm and an efficiency of 145lm/W. Manufactured in die cast aluminium alloy with low copper content perfect for aggressive environments and finished in powder coating in black color. Degree of protection IP66 and IK08. DALI driver.

### Dimensions

Product dimensions (mm) **447x359x75mm**

### Scheme

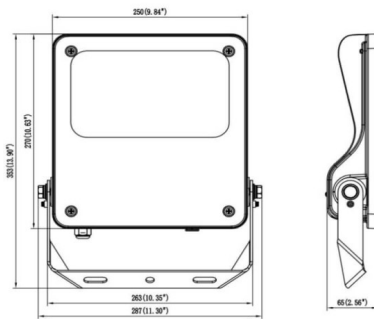

80W/100W

Item code	86.OF03.3433.02				
Product type	Indoor				
Category	Industrial				
Family	SAFE				
Pictograms					

<b>Product</b>	
Real power (W)	100
Real luminous flux (Lm)	14500
Luminous efficiency (Lm/W)	145
Beam angle (°)	60°
IP	IP66
Operating temperature	-30°C to + 50°C
Colour	black
Control gear included	yes
Control gear	DALI
Power Factor	>0,97
Flicker Free	YES
Light source	LED
Type of LED	NF2W757GR-V3
Average life time (h)	Up to 100,000hrs LM79
Colour temperature (K)	4000K
Colour consistency (SDCM)	5
CRI	70
IK	IK08