





SAFE

Lavov outdoor floodlight from the family SAFE with a power of 200W and an optic of 25°. . With a total lumen output of 29000 lm and an efficiency of 145lm/W. Manufactured in die cast aluminium alloy with low copper content perfect for aggressive environments and finished in powder coating in black color. Degree of protection IP66 and IK08. DALI driver.


Item code	86.OF03.5423.02
Product type	Indoor
Category	Industrial
Family	SAFE
Pictograms	<div><div></div><div></div><div><div>IK 10</div></div><div><div>CE</div></div><div>Driver INCL.</div></div> <div><div>IP 69</div><div>CRI 70</div><div>SDCM 5</div></div>

Product	
Real power (W)	200
Real luminous flux (Lm)	29000
Luminous efficiency (Lm/W)	145
Beam angle (°)	25°
IP	IP66
Operating temperature	-30°C to + 50°C
Colour	black
Control gear included	yes
Control gear	DALI
Power Factor	>0,99
Flicker Free	YES
Light source	LED
Average life time (h)	Up to 100,000hrs LM74
Colour temperature (K)	4000K
Colour consistency (SDCM)	<5
CRI	70
IK	IK08

Dimensions

Product dimensions (mm)	447x359x75mm
--------------------------------	---------------------

Scheme

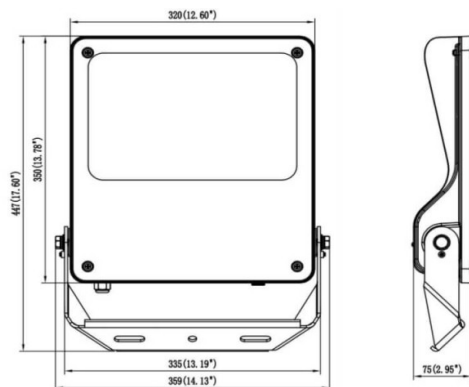

200W