




### SAFE

Lavov outdoor floodlight from the family SAFE with a power of 200W and an optic of 55°X125°. With a total lumen output of 29000 lm and an efficiency of 145lm/W. Manufactured in die cast aluminium alloy with low copper content perfect for aggressive environments and finished in powder coating in black color. Degree of protection IP66 and IK08. ON-OFF driver.

### Dimensions

Product dimensions (mm) **447x359x75mm**

### Scheme

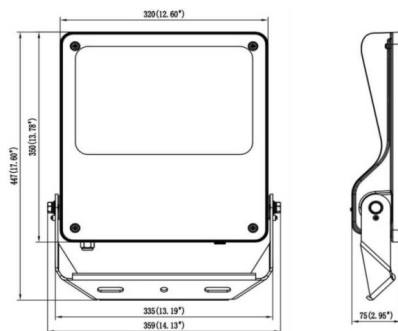

200W

|              |                 |
|--------------|-----------------|
| Item code    | 86.OF03.5451.02 |
| Product type | Indoor          |
| Category     | Industrial      |
| Family       | SAFE            |
| Pictograms   | <br>            |

|                            |                       |
|----------------------------|-----------------------|
| Product                    |                       |
| Real power (W)             | 200                   |
| Real luminous flux (Lm)    | 29000                 |
| Luminous efficiency (Lm/W) | 145                   |
| Beam angle (°)             | 55°X125°              |
| IP                         | IP66                  |
| Operating temperature      | -30°C to + 50°C       |
| Colour                     | black                 |
| Control gear included      | yes                   |
| Control gear               | ON-OFF                |
| Power Factor               | >0,99                 |
| Flicker Free               | YES                   |
| Light source               | LED                   |
| Type of LED                | NF2W757GR-V3          |
| Average life time (h)      | Up to 100,000hrs LM74 |
| Colour temperature (K)     | 4000K                 |
| Colour consistency (SDCM)  | 5                     |
| CRI                        | 70                    |
| IK                         | IK08                  |