



**SAFE**


Lavov outdoor floodlight from the family SAFE with a power of 240W and an optic of 60°. . With a totsl lumen output of 34800 lm and an efficiency of 145lm/W. Manufactured in die cast aluminium alloy with low cooper content perfect for aggressive environnements and finished in powder coating in black color. Degree of protection IP66 and IK08. ON-OFF driver.

|              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item code    | 86.OF03.6431.02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Product type | Indoor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Category     | Industrial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Family       | SAFE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Pictograms   | <div><div></div><div><br/>850°</div><div><br/>IK 10</div><div></div><div><br/>Driver INCL.</div><div><br/>CRI 70</div><div><br/>SDCM 5</div></div> |

## Dimensions

|                                |                     |
|--------------------------------|---------------------|
| <b>Product dimensions (mm)</b> | <b>495x419x75mm</b> |
|--------------------------------|---------------------|

### Scheme

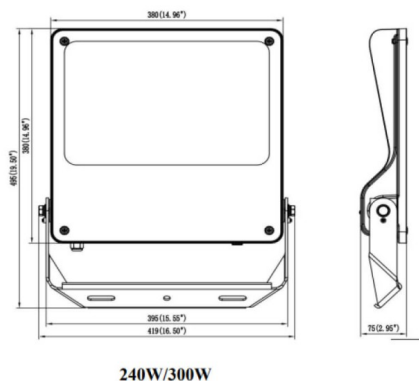

|                            |                       |
|----------------------------|-----------------------|
| Product                    |                       |
| Real power (W)             | 240                   |
| Real luminous flux (Lm)    | 34800                 |
| Luminous efficiency (Lm/W) | 145                   |
| Beam angle (°)             | 60°                   |
| IP                         | IP66                  |
| Operating temperature      | -30°C to + 50°C       |
| Colour                     | black                 |
| Control gear included      | yes                   |
| Control gear               | ON-OFF                |
| Power Factor               | >0,100                |
| Flicker Free               | YES                   |
| Light source               | LED                   |
| Type of LED                | NF2W757GR-V3          |
| Average life time (h)      | Up to 100,000hrs LM82 |
| Colour temperature (K)     | 4000K                 |
| Colour consistency (SDCM)  | 5                     |
| CRI                        | 70                    |
| IK                         | IK08                  |