




SAFE

Lavov outdoor floodlight from the family SAFE with a power of 240W and an optic of 55°X125°. . With a total lumen output of 34800 lm and an efficiency of 145lm/W. Manufactured in die cast aluminium alloy with low copper content perfect for aggressive environments and finished in powder coating in black color. Degree of protection IP66 and IK08. DALI driver.

Dimensions

Product dimensions (mm) **495x419x75mm**

Scheme

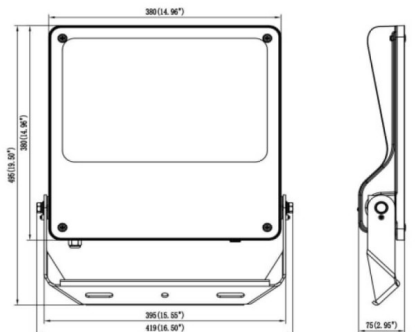

240W/300W

| | |
|--------------|-----------------|
| Item code | 86.OF03.6453.02 |
| Product type | Indoor |
| Category | Industrial |
| Family | SAFE |
| Pictograms | |

| | |
|----------------------------|-----------------------|
| Product | |
| Real power (W) | 240 |
| Real luminous flux (Lm) | 34800 |
| Luminous efficiency (Lm/W) | 145 |
| Beam angle (°) | 55°X125° |
| IP | IP66 |
| Operating temperature | -30°C to + 50°C |
| Colour | black |
| Control gear included | yes |
| Control gear | DALI |
| Power Factor | >0,100 |
| Flicker Free | YES |
| Light source | LED |
| Type of LED | NF2W757GR-V3 |
| Average life time (h) | Up to 100,000hrs LM75 |
| Colour temperature (K) | 4000K |
| Colour consistency (SDCM) | 5 |
| CRI | 70 |
| IK | IK08 |